

THE SOUND ENGINEERING MAGAZINE

SEPTEMBER 1980
\$1.95

db



Jim is one of the good ol' boys of Nashville. His engineering career stretches back some 18 years to the days of mono mixing. He's done everything from pop to R&B to disco—and, of course, country. The aviation industry gave Jim his technical background. But he's also prepared himself by playing four or five different instruments. Some of the names on the other side of the glass from him include Bob Dylan; Simon and Garfunkel; Peter, Paul and Mary; Loretta Lynn; Johnny Cash; Don Williams; Marty Robbins; Conway Twitty; Ray Price; and Roy Clark.

ON SPECIALISTS

"Let me say that I have sympathy for them, because they're missing the rest of the world of music. They're locked into one thing and I got it all. I have done four different styles of music in one day. I did a disco record that got to number six on the Billboard charts, 'Dance With You.' In the same day, I did a number one country record. You don't listen to the same kind of music all the time. And I don't want to listen to the same kind of music all the time, either."

ON OVERPRODUCTION

"'Swarm.' That's my term for over-production. I've had producers who have turned and said, 'Well, how many tracks have we got left?' You may look at the chart and say, 'Well, we've got nine tracks left.' He'll say, 'Great.' And he looks into the window of the studio. 'Hey, let's put an electric piano on.' Not because the electric piano fits the song and has a place or meaning

in the rhythm or in the feel of the song, but it's because he sees one in the room and we've got nine tracks to go. And that's overproduction, abuse of multitrack recording. And that I don't condone."

ON PLAYBACKS

"I actually mix. I don't load tape. I like to sit down at the console, set my monitor levels equal and put the band together and get a monitor mix in the control room that sounds as close as I can make it to the record, so that the producer and the artist and the musicians can hear and understand what they're doing and correct their mistakes. I'm an old mono mixer. And that's what built mono mixing."

ON TAPE

"A competitor of 3M has stated that 3M has a greater print-through than their product. It's my opinion that there is no greater print-through on the Scotch® 250. It's just not masked with modulation noise. There also was a comment that the competitor's tape was brighter, when in fact, there was just more third harmonic distortion in the 10 to 12 kc range. I am very stringent on monitoring in the control room. And when I hear a signal off the floor, I want it to come back off the tape the same way. I don't want it to be embellished with third harmonic distortion to make it brighter, or modulation noise to confuse the bass line."

**SCOTCH 250
WHEN YOU LISTEN FOR A LIVING.**

JIM WILLIAMSON ON TAPE.

'Scotch' is a registered trademark of 3M.

3M

Coming Next Month

- Is your studio really humming (at 60 or 120 Hz)? Are you infinitely baffled by standing waves? Were you "off the air" for an hour, and no one complained?
- You may need help, and next month we've got some, as our authors tackle the ways and means of getting and keeping your studio's system and acoustics in good shape.



THE SOUND ENGINEERING MAGAZINE

SEPTEMBER 1980 NUMBER 14, VOLUME 9

EDITORIAL	31
MEASURING THE SOUND OF RADIO Eric Small	32
COMPUTER-INTERFACEABLE EUMIG-1000 Tom Bensen	38
WIRELESS MICROPHONES— ON STAGE AND IN THE STUDIO John Nady	41
BROADCAST SIGNAL PROCESSING: THE DBX APPROACH Leslie Tyler	48
A db SPECIAL REPORT— WHAT'S NEW AT THE FCC? John M. Woram	51
LETTERS	6
DIGITAL AUDIO Barry Blesser	12
THEORY AND PRACTICE Norman H. Crowhurst	18
SOUND WITH IMAGES N. I. Weinstock	24
NEW PRODUCTS AND SERVICES	28
CLASSIFIED	53
PEOPLE, PLACES, HAPPENINGS	56



is listed in **Current Contents: Engineering and Technology**

Larry Zide
PUBLISHER

John M. Woram
EDITOR

Mark B. Waldstein
ASSOCIATE EDITOR

Kathy Lee
ADVERTISING PRODUCTION

Eloise Beach
CIRCULATION MANAGER

Lydia Anderson
BOOK SALES

Bob Laurie
ART DIRECTOR

Crescent Art Service GRAPHICS AND LAYOUT

db, the Sound Engineering Magazine (ISSN 0011-7145) is published monthly by Sagamore Publishing Company, Inc. Entire contents copyright 1980 by Sagamore Publishing Co., 1120 Old Country Road, Plainview, L.I., N.Y. 11803. Telephone (516) 433-6530. db is published for those individuals and firms in professional audio-recording, broadcast, audio-visual, sound reinforcement, consultants, video recording, film sound, etc. Application should be made on the subscription form in the rear of each issue. Subscriptions are \$12.00 per year (\$24.00 per year outside U.S. Possessions and Mexico; \$13.00 per year Canada) in U.S. funds. Single copies are \$1.95 each. Editorial, Publishing and Sales Offices: 1120 Old Country Road, Plainview, New York 11803. Application to mail at Controlled Circulation postage rates is pending at Old Saybrook, Connecticut 06475.

About The Cover

- An Audiotronics 26-input Model 110A Audio Console highlights this sound effects master control facility. Installed earlier this year at ABC's Broadcast Center on 67th Street in New York, this control room serves two adjacent live effects and layover studios, as well as providing effects to twelve TV studios and post-production facilities.

PRO AUDIO SEATTLE

WE'VE GOT IT ALL UNDER ONE UMBRELLA

MCI Recorders
MCI Consoles
MCI SMPTE
MCI Automation

And over 55 lines including: AKG, Ampex, Annis, Auralone, Beyer, BGW, DBX, Deltalab, ElectroVoice, Eventide, Gauss, Ivie, JBL, Klipsch, Koss, Leader, Lexicon, Master Room, MRL, Neumann, Orban, Otari, Revox, Roland, Sequential Circuits, Scotch, Sennheiser, Shure, Sony, Sound Workshop, Stanton, STL, Tangent, Tapco, Tascam, Teac, Technics, UREI, Vega

PROAUDIOSEATTLE
 Professional Audio Equipment and Services
 (206) 367-6800
 11057 8th NE, Seattle, WA 98125

db Letters

Index of Advertisers

ADC	15
Agfa-Gevaert	10
American Radio Exposition	23
Ampex	9
Andrews Audio	42
Audio Environments	26
Audio-Technica	17
BGW	35
Bose	25
BTX	49
Crown	27
Electro-Voice	11
ESE	46
Garner Industries	20
Inovonics	50
JBL	21
Lexicon	43
McMartin Industries	22
R. K. Morrison Illust. Mats.	29
Neptune	19
Neve	Cover 4
Orban	16
Polyline	29
Pro Audio Seattle	6
Sescom	28
Shure Brothers	7
SPARS	14
Soundcraftsmen	18
Standard Tape Lab	12
Studer Revox	13
TAD, U.S. Pioneer Electronics	45, 47
Telex Turner	8
Tentel	52
The Astatic Corp.	39
The Mike Shop	30
3M	Cover 2
URSA Major	10
VIZ Manufacturing	24

TO THE EDITOR:

In John Borwick's article highlighting British professional equipment manufacturers (June, 1980), the author listed B&W Loudspeakers, but failed to name the US representative. The representative for B&W Loudspeakers in the United States is Anglo American Audio, 1080 Bellamy Road North, Scarborough, Ontario, Canada M1H 1H2.

M. J. Remington

TO THE EDITOR:

We have been reading the letters regarding broadcast audio processing with great interest. Here at WMBM we have taken every step possible to insure that all dynamic range is eliminated.

All music is taped thru two very fast peak limiters hooked up in series. The compression ratio is 200 to 1, release time is 20ms. At this stage we add 15 to 20 dB of boost above 5kHz. This is to insure optimum tape saturation. Phono cartridge tracking force has been optimized at 0.2 grams; this results in a very punchy sound to the highs. Our music is so hot it sounds like the stylus is going to jump out of the groove.

We start our audio chain by chopping off those annoying highs above 7.5 kHz. A 48 dB-per-octave high-pass filter at 150 Hz removes the irritating thumps so common on today's disco records. Next the audio hits our special custom-made 27-band compressor featuring over 135 adjustments. The discriminating listener appreciates this attention to spectral consistency and true loudness. Following this is the triple-stage hard clipper. The audio is clipped so drastically that the alley behind the station is filling up with the round tops of all the sine waves that we clip.

The transmitter is two 1kw solid-state units in parallel to handle the virtual DC modulation. Special bribe arrangement with the FCC allows 500% positive peak modulation.

Listener reaction? Just amazing. WMBM has replaced over 150 speaker cones damaged by DC modulation. Lawsuits are pending on 12 auto crashes resulting from listener fatigue. Cume



sales offices

THE SOUND ENGINEERING MAGAZINE

New York

1120 Old Country Rd.
 Plainview, N.Y. 11803 516-433-6530

Roy McDonald Associates, Inc.

Dallas

1949 Stemmons Freeway—Suite 670
 Dallas, Texas 75207 214-742-2066

Denver

14 Inverness Drive E., Bldg. 1—Penthouse
 Englewood, Colo. 80112 303-771-8181

Houston

6901 Corporate Drive, Suite 210
 Houston, Texas 77036 713-988-5005

Los Angeles

424 West Colorado St., Suite 201
 Glendale, Cal. 91204 213-244-8176

Portland

P.O. Box 696
 510 South First

Portland, Oregon 97123 503-640-2011

San Francisco

265 Baybridge Office Plaza,
 5801 Christie Avenue
 Emeryville, Cal. 94608 415-653-2122

Karaban/Labiner Inc.

New York

25 West 43rd Street
 New York, N.Y. 10036 (212) 840-0660

Chicago

333 N. Michigan Ave.
 Chicago, Ill. 60601 (312) 236-6345

SHURE®

StarMaker™ SERIES

SM77•SM78

cardioid dynamic microphones



a new look for the 80's

There's so much new about these professional microphones we can only touch the highlights. Exclusive "picture perfect" SUEDECOAT™ Tan or Ebony matte finish looks great—permanently. Significantly smaller, exceptionally light in weight; yet so extraordinarily rugged and reliable we call them the "Light Heavyweights." They feature the crisp sound that makes Shure the world's most widely used professional performer microphones.

FACT
®
 GENUINE
SHURE

For more information write:

Shure Brothers Inc., 222 Hartrey Ave.,
Evanston, IL 60204
In Canada: A. C. Simmonds & Sons Limited
Manufacturers of high fidelity components, microphones,
sound systems and related circuitry.

Circle 35 on Reader Service Card

Desk Paging?



Turner has More!

Turner desk paging microphones allow the audio professional more flexibility in choosing the right microphone for each installation. A minimum amount of electronic modification is required because Turner has engineered its products to meet virtually all applications. Twelve distinctly different microphones in two desk-top case styles. There is a quality Turner desk paging microphone with features to meet the following applications requirements:

- Omnidirectional • Low Impedance • Normally Open Switching
- Normally Closed Switching • High Impedance • Zone Paging
- Cardioid • Noise Cancelling • Press-To-Talk • Lift-To-Talk
- Amplified.

And, that's only the beginning. Turner has 13 other paging microphones in gooseneck, handheld and wall mount versions, as well as a full line of sound reinforcement microphones. Turner does have more, and now, with the additional product development strength of Telex Communications, Inc. there will be even more to come.

Quality Products for The Audio Professional



TELEX® TURNER®

TELEX COMMUNICATIONS, INC.

9600 ALDRICH AVE. SO., MINNEAPOLIS, MN 55420 U.S.A.
EUROPE: 22, rue de la Legion-d'Honneur, 93200 St. Denis, France.

ratings have jumped 350% but quarter-hour ratings have dropped unexpectedly. Here at WMBM we are proud to have solved the audio processing dilemma.

GREG STRICKLAND
Chief Engineer

db replies:

Well done! But couldn't you raise your auto crash ratings a bit? Also, you could avoid cone damage by soldering a ten-penny nail across each listener's terminals. That would really take care of your quarter-hour problem as well (No charge for this advice.)

TO THE EDITOR:

Before running out to buy a reel of two-inch videotape, expecting 5 MHz response from your 24-track, consider a few facts of recording life.

No direct analog magnetic recording system is good for reproducing substantially more than a range of ten octaves. While any properly set up professional video machine will record and reproduce a bandwidth exceeding 5 MHz, (greater than eighteen octaves) demanded by a high resolution color video signal, this is accomplished by frequency modulating a "carrier" between 7 and 10 MHz, (less than one octave). The head-to-tape writing speed required to handle this frequency range is 1500 ips, accomplished via a rotating headwheel carrying four heads. Complex capstan and head servosystems along with various timebase error reduction circuits help to restore the original signal.

Now to the tape. The particle orientation for videotape used in this manner is 90 degrees referenced to the tape edge. This works well for the scanning video head, but tends to destroy the linearity of any audio tracks recorded the "regular way." The thin coatings, while firmly attached to the backing, do not lend themselves to the signal and bias levels to which audio engineers have become accustomed. This is of no consequence in video, since the FM video signal is recorded at a level approaching saturation.

Helical systems are a slightly different matter. Despite Mr. Weinstock's reference to "Helical particle orientation," SMPTE standards dictate longitudinal alignment—like audiotape—for professional-format helical-scan videotapes.

While helical systems offer greatly improved audio performance when compared to older VTR audio, the backing thickness and coating thickness again limit the audio signal drives and bias conditions to something less than those considered optimum in an audio application. Reference fluxivity for C-format audio is 100 nanoWebers/Meter—nearly 8 dB below the level of a "normal" 250 nWb/M audio machine.

While I have disagreed with some of Mr. Weinstock's technical comments, I

STAR QUALITY RUNS IN THE FAMILY

Shown clockwise from top: Ampex 2" Grand Master professional Audio Tape, 1/4" Grand Master Professional Audio Tape, Professional Audiocassette, Grand Master Consumer Audiocassettes and 406 Professional Audio Tape.

More studios master their hit albums on Ampex Grand Master™ recording tape than on all other tapes combined. That's why we call Grand Master the tape of the stars.

But Ampex star quality doesn't end with the tape of the stars. It extends throughout the entire Ampex tape line:

HEAR IT

You'll find Ampex star quality in professional audio tape in every configuration. And in cassette, 8-track and open reel for consumer use.

SEE IT

Ampex brings star quality to videotape, too. In quadruplex, helical and 3/4" U-matic versions for professional use. And 1/2" Beta- and VHS-format videocassettes for home and industry.

TEST IT

You'll even find Ampex tape in starring roles recording instrumentation data for critical aerospace uses and other precision applications. Star quality doesn't happen overnight. It's the result of the continuing Ampex commitment to engineering excellence. And it extends from the top of our line right through the entire Ampex family.

Shown clockwise from standing reel:
Ampex 175 2" Quadruplex Tape, 3/4" U-Matic Videocassette, VHS and Beta 1/2" Consumer Videocassettes, Beta 1/2" Industrial Videocassette and 196 1" High Energy Helical Videotape.

AMPEX

Ampex Corporation, Magnetic Tape Division, 401 Broadway, Redwood City, California 94063.415/367-3887

Circle 29 on Reader Service Card

When The Others Don't Come Up To Level



...our PEM 468 Studio Mastering Tape will. Accepted on the highest level as "the tape" for top quality original recording, it's available to the discerning as a low-noise, high-output, low-print mastering tape, in 1/4", 1/2", 1" and 2" - and PEM 526 Bintape in 1/4", 1/2" and 1". When your standards for recording demand the highest, come up to that level - and surpass it - with AGFA-GEVAERT Mastering Tape. Contact us TODAY!

MASTERING TAPE

AGFA-GEVAERT, INC. 275 North Street, Teterboro, N.J. 07608 (201) 288-4100

Circle 17 on Reader Service Card

Ursa Major Is a Sound Improvement

If you work with close-miked sound sources, the Ursa Major SPACE STATION™ is one of the most creative sound processing tools you can own. This innovative new digital reverb system adds warmth and body to a speaker's voice, enhances both live and recorded music, and generates special effects that range from the subtle to the exotic. Unlike simple delay units, the SPACE STATION incorporates a proprietary Multi-Tap Digital Delay algorithm, in which a digital RAM can be tapped at more than 20 locations at once. With this feature, you can simulate an almost endless variety of reverberant spaces, from tiny rooms to parking garages and concert halls.

Check out the SPACE STATION soon. For reverberation quality and variety, for special effects features, and for price, the SPACE STATION is the best sound improvement you can make.

US Price: \$1995



Demonstration cassettes for broadcast and recording applications are available for \$2.00 each.

 **URSA MAJOR™, Inc.**

Box 18, Belmont, MA 02178 • Telephone (617) 489-0303
Telex: 921405 URSAMAJOR BELM



Circle 12 on Reader Service Card

strongly agree with him that we are crossing into a new period of radio awareness in the field of television, to the benefit of all of us.

PALMER S. PATTISON
Audio Engineer
KUED-TV

db replies:

Oops! Change the offending sentence so that it describes superior results (when recording audio in videotape), unless particle orientation has not been optimized for helical-scanning. This restores Weinstock's—and the tape's—original orientation.

To THE EDITOR:

I really appreciate the highly technical articles in your magazine. It's amazing what those of us involved in sound engineering can learn from just one periodical. Scott Pelking's article in the July issue of db on how to build a "PRASP" was just too good to be true. My only complaint is that Mr. Pelking didn't say what brand of undershirt works best for applying stain. However, I checked with several engineers and the consensus is that Hanes is the best, with Fruit-Of-The-Loom a close second. Perhaps you could get Scott to do some more writing for db. I, for one, would enjoy an article about building bookends or an end-table. Maybe he could even discuss whether it is better to use a $\frac{3}{4}$ -inch or $\frac{1}{2}$ -inch hole when constructing a wren house.

ORIN N. FRIESEN
Chief Engineer
KEYN AM & FM
Long-Pride Broadcasting, Inc.

db replies:

We've always thought that gentlemen prefer Hanes, although for AC/DC operation, you may want to try Fruit-of-the-Loom.

For bookends, why not try a miniature PRASP? Actually, you'll need two of them; one for each side of the book (or books). You can also lay a PRASP on its side, if you need an end-table.


As for the birds, that's a little bit beyond our scope. However, we imagine you should measure the wrens before drilling. But, as a chief engineer, you probably know all about birdies already.

To THE EDITOR:

We would like to take this opportunity to thank you for the article you did on Indian Creek Recording Studio in your June issue. There was however one fact (misprint) which was not correct and is very important to us and even more so to our clients. Our rates are \$100 per hour instead of the \$200 quoted. We feel that this is an extremely competitive rate for a studio of this quality.

JOHN ROLLO
Chief Engineer

constant di·rec·tiv·i·ty

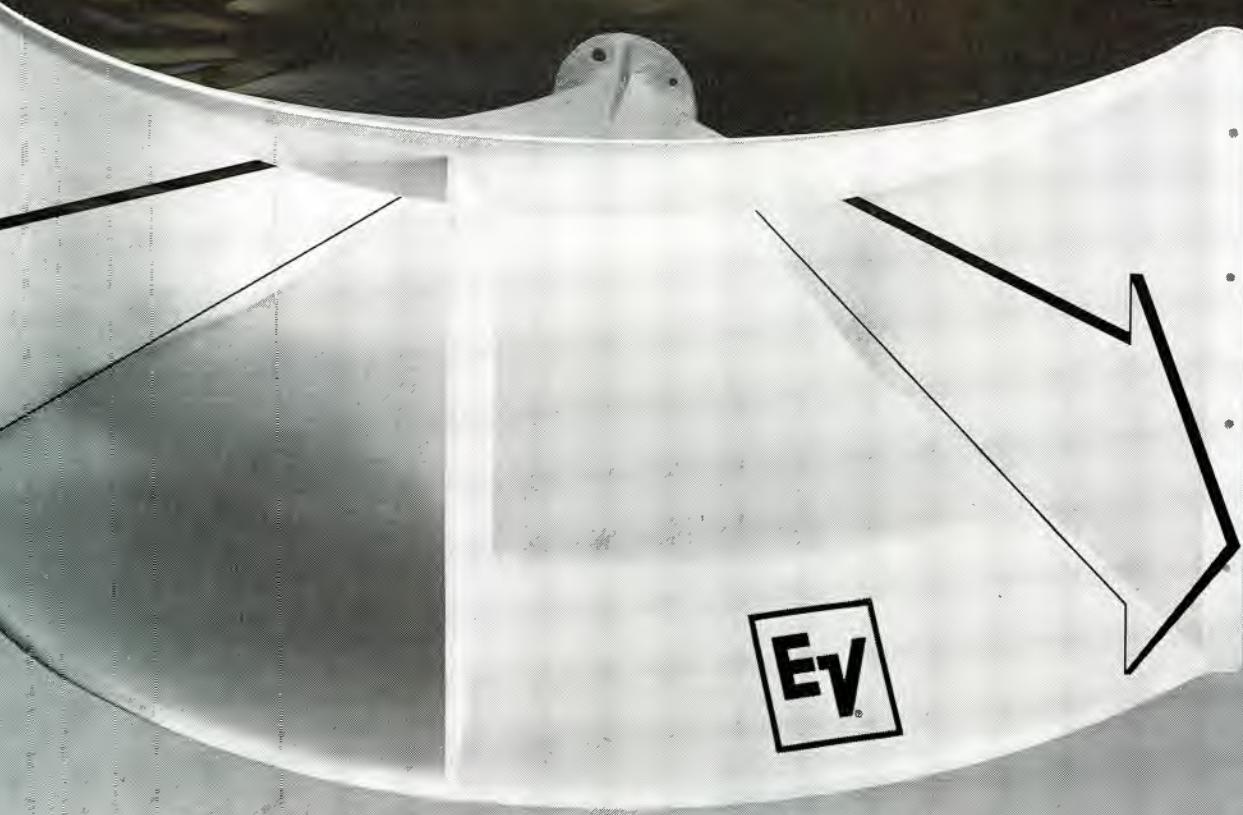

The characteristic of a horn that directs all of the frequencies where you want them to go.

Most horns offer some control of the sound pattern they produce. The problem is that frequencies at the center of the pattern are different from those at the edges.

Unless you use HR Constant Directivity horns, that's the problem you'll have. To the audience this means unintelligible, too bright, too dull, and sometimes just plain bad sound at many seats.

These patented **HR Constant Directivity** horns from Electro-Voice provide full-range frequency coverage and effectiveness of pattern control

unheard of before E-V engineers developed this unique design concept.

Demand for the "white horns" has grown dramatically—almost completely by word-of-mouth. Once a sound engineer, musician or facility owner hears the difference **HR Constant Directivity** makes, a new demand is created.

Ask someone who has used or heard them, or buy a pair and try them yourself. You'll probably hear that HR horns are so clearly superior that other choices are obsolete.


Write to Electro-Voice for more information. We'll send you a complete set of Engineering Data Sheets and a paper comparing the today performance of HR constant directivity horns with yesterday's promises. Include \$1 with your request, and we will put you on the mailing list for the E-V "PA Bible," a down-to-earth series of papers on the selection and application of professional PA products and concepts!

¹U.S. Patent Number 4071112



Electro-Voice®
a gulton company

600 Cecil Street, Buchanan, Michigan 49107

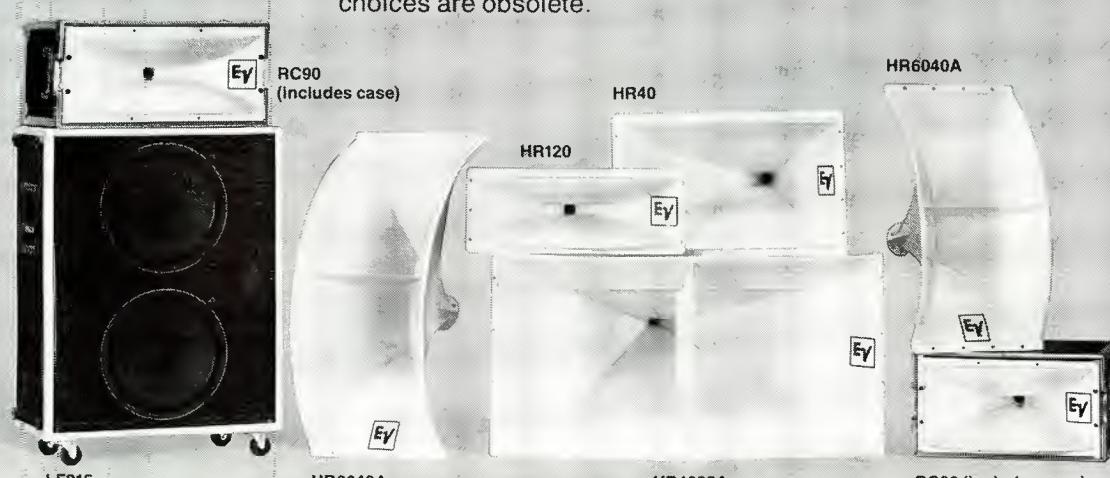

Circle 19 on Reader Service Card

db Digital Audio

Digital Audio

Up to this point in our discussion, we have considered the encoding process where the audio signal passes through the anti-aliasing low-pass filter, the sampler and the analog-to-digital converter. The result is a series of digital numbers. But now, let's consider the decoding process, in which this series of numbers is converted back into a continuous audio signal. These encoding and decoding operations are mirror images; each element in the encoder has its counterpart in the decoder.

Just as the analog-to-digital converter (ADC) transforms a single voltage value into a digital word, the digital-to-analog converter (DAC) transforms the digital word into a single voltage. Conceptually, the digital-to-analog conversion is much simpler, since each digital number

corresponds exactly to a particular voltage. In analog-to-digital conversions, there is a quantization error, since a range of voltages within the quantization interval are all transformed to a single digital number. There is no corresponding quantization error in digital-to-analog conversions.

Consider a 10-bit digital word which is to be converted to an analog voltage. The 10-bit word specifies one of 1024 different voltages. Thus, the number 1 might correspond to 0.001 volts, the number 2 (0010) to 0.002 volts, the number 3 (0011) to 0.0003 volts, etc. Since there are 1024 unique voltages, this DAC would have a range of +0.511 to -0.512 in steps of 0.001 volts. (The range is asymmetric since 0.0 volts is one of the 1024 voltages.)

DE-SAMPLING

We must now consider the process by which the individual samples of the DAC can be smoothed to create a continuous audio sample. This is the reverse of the sampling process in the encoder. At this point in our discussion we need to digress, since the way of analyzing the smoothing processes is different from the way they are actually built. We may think of the DAC's output as being a series of samples, as shown in FIGURE 1A or, we may think of it as being a constant voltage between samples, as in FIGURE 1B. In both figures, the DAC produces a voltage corresponding to the digital word. However, in the top figure, the DAC produces its output for a very short "sampling" time. In the bottom figure, the DAC "holds" its voltage until the next digital word enters to change the value. Now, forget FIGURE 1B for the time being and we will return to it later on.

Since we will be using a low-pass filter to smooth the DAC's output, it would be wise to consider the spectrum of the signal represented in FIGURE 1A. By understanding the spectral content, we can see clearly how the low-pass filter creates the desired signal. FIGURE 2 shows the way in which the waveform of FIGURE 1A could have been created. FIGURE 2A shows a 1 kHz audio signal. This will be multiplied by the sampling signal in FIGURE 2B to create the result in FIGURE 2C. The sampling signal in FIGURE 2B is a periodic pulse train with a

STL

PRECISION




MAGNETIC TEST TAPES

STANDARD TAPE LABORATORY, INC.

26120 EDEN LANDING ROAD #5, HAYWARD, CALIFORNIA 94545 • (415) 786-3546

Figure 1. (A) The sine wave is sampled at regular intervals; (B) each sample voltage is held until the next sample is taken.

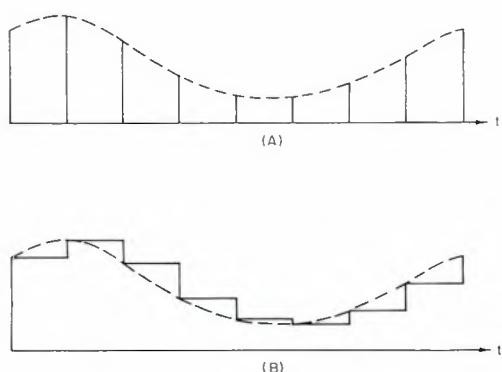

THE STUDER STANDARD

Good is not enough, only excellence is adequate.

The Studer A80/RC Mk II. For studio mastering. Or cutting master lacquers. Or broadcast syndication or master film soundtracks. Whenever you need a 1/4-inch master recorder you can base your reputation on, you need a machine built to the unique Studer standard of excellence. The Studer A 80/RC Mk II.

Compare the editing facilities of the A80/RC Mk II with any other master recorder on the market. And the unique Studer real-time (positive and negative) digital tape position indicator and zero-locating feature. Compare the noise level of its electronics. Check out the wide variety of available head configurations, including a pilot tone version with or without resolver for

film sync applications. Vari-speed control (± 7 musical semitones) is standard, as is a monitor panel with built-in speaker/amplifier which lets you cue the tape right at the machine without tying up your monitor system.

As for servicing ease, the A80/RC Mk II is simply incomparable. All the logic boards have LED status indicators so a failure can be spotted instantly. You can even take apart the entire recorder with the two Allen wrenches supplied.

Of course, there aren't any secrets to the incredible rigidity of the die-cast, precision-milled A80 frame and the extraordinary machining tolerances of its stainless steel headblock. Only Willi Studer's characteristic unwillingness to compromise.

Others could make their heads and motors as well, no doubt; they just don't. Servo-controlled reel torque and capstan drive (independent of line frequency or voltage) aren't exactly new concepts. Nor is PROM-logic transport control. But try them all out and see whether you can settle for anything less than the Studer A80/RC Mk II.

Second best is very good today. But not good enough.

Studer Revox America, Inc.
1425 Elm Hill Pike, Nashville, TN 37210
(615) 254-5651
Offices: Los Angeles (213) 780-4234
New York (212) 255-4462
In Canada: Studer Revox Canada, Ltd.

STUDER REVOX



Circle 10

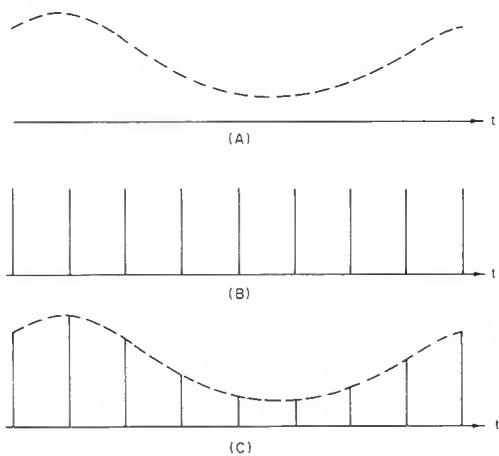


Figure 2. (A) A 1 kHz audio signal; (B) The sampling signal; (C) $A \times B = C$.

fundamental at the sampling frequency and many overtones or higher harmonics. If the fundamental is 40 kHz, we would expect to find energy at 80 kHz, 120 kHz, 160 kHz, etc. Multiplication is like a very severe nonlinearity which creates large amounts of sidebands. This is similar to amplitude modulation or the intermodulation of two sine waves. As with intermodulation distortion, the resulting signal contains frequencies at the sum and difference of the components. The waveform in FIGURE 2C

contains energy at 1 kHz (audio), 39 kHz (sampling frequency - audio frequency), 41 kHz (sampling frequency + audio frequency), 79 kHz (2 × sampling frequency - audio frequency), 81 kHz (2 × sampling frequency + audio frequency), etc.

SOUND WITHOUT IMAGES

The role of the smoothing filter is to remove all components other than the 1 kHz audio. These other components are called "images" since the spectra centered at 40 and 80 kHz are the same as the audio spectrum centered at DC. If the audio signal contains components of 100 Hz, 200 Hz and 800 Hz, then the sampled signal will also contain these components, as well as image components at 40 kHz, 40.1 kHz, 40.2 kHz and 40.8 kHz. There will also be mirror images at 39.9 kHz, 39.8 kHz and 39.2 kHz. Since the smoothing filter must remove these images, it is called an anti-image filter.

The anti-aliasing filter at the input limits the energy in the audio to less than 20 kHz in this example. But, a 19 kHz audio signal produces images at 21 kHz [40 - 19], 59 kHz [40 + 19], 61 kHz [2 × 40 - 19] and 99 kHz [2 × 40 + 19]. The desired signal at 19 kHz must be separated from the nearby undesired image at 21 kHz. For this reason, it is

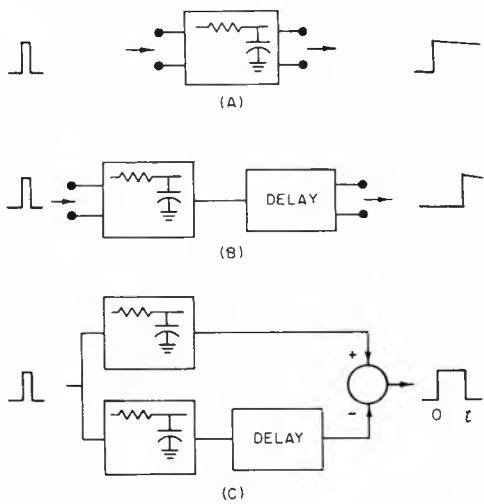


Figure 3. (A) Input and output of a low-pass filter with a very long time constant; (B) A low-pass filter with an extra delay inserted; (C) $A - B = C$.

usually better to limit the anti-aliasing filter to a frequency lower than half the sampling frequency. This provides a guard-band for the transition between desired and undesired signals. An 18 kHz limit allows a 4 kHz guard band, since the nearest image is now (40 - 18) 22 kHz.

SAMPLE-HOLD

We are now in a position to return to the actual implementation of the DAC using an implied hold. FIGURE 1B can be thought of as holding the sample between successive words. We must now show that the effective holding action, which turns a very short pulse into a longer rectangular pulse, is nothing more than a filter. FIGURE 3A shows the input and output for a low-pass filter with a very long time constant, which is called an integrator. FIGURE 3B shows another low-pass filter with an extra delay inserted. If these two outputs are subtracted, as in FIGURE 3C, the output is a pulse. This operation turns the sample pulses of FIGURE 1A into the held pulses of FIGURE 1B. Hence, the only difference between them is the filtering produced by our delay-integrator-subtractor. The implied hold is nothing more than a filter which has the frequency response given by the equation below:

$$H(f) = \frac{\sin(\pi f_a T_s)}{\pi f_a T_s}$$

where f_a is the audio frequency and T_s is the sampling period. It is impossible to demonstrate this equation without higher mathematics and the reader should consult other references for a proof. The important thing to note is that this filtering effect reduces the high frequencies in the audio band somewhat, and this must be corrected. The filtering effect of the hold is called the *aperture*

**OCT. 30
IS AUDIO
RECORDING
CONFERENCE III
DON'T MISS IT!**

BUSINESS PERSPECTIVE / 10 AM - 1 PM
STUDIO MARKETING TECHNIQUES
TECHNICAL PERSPECTIVE / 2 - 5 PM
DOWNTIME / THE INVISIBLE THIEF
ENGINEERING PERSPECTIVE / 7 - 10 PM
UNVEILING THE SPARS STUDY OF RECOMMENDED
AUDIO RECORDING PRACTICES


for reservations & further
information write or call
(215) 735-9666

CONFERENCE TO TAKE PLACE IN
NEW YORK CITY AT THE DORAL INN
\$150 full conference or \$75/seminar.
Students & faculty \$75 full conference
Door registration \$10 additional.

SPARS
SOCIETY OF PROFESSIONAL
AUDIO RECORDING STUDIOS

WRITE FOR INFORMATION TO SPARS
215 S. Broad Street, 7th Floor
Philadelphia, PA 19107

Circle 36 on Reader Service Card

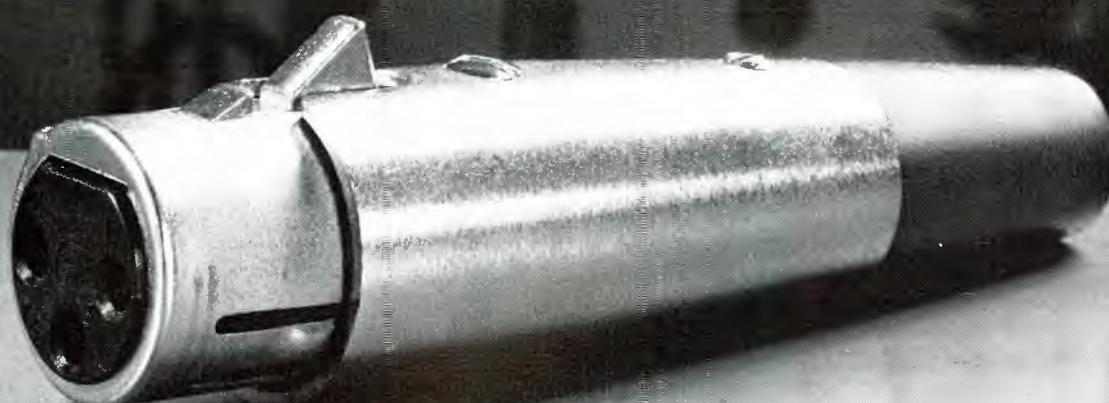

Sound Choice

Here's the class act in ADC's Pro-Line.
Eight new, low impedance sound connectors that perform as great as they look.

We've added eight new male and female plugs to our ever growing family of high quality and high reliability Pro-Line Connectors. All feature a rugged, zinc die cast metal housing finished in either brushed nickel or conductive black plating. A tough, die cast latch and mechanical keyway locks the plug receptacle in a perfect fit. The separate ground terminal is electrically integral with the connector shell to minimize "glitches" from outside interference.

ADC also offers crack-resistant,



ADC Products

A DIVISION OF MAGNETIC CONTROLS COMPANY

4900 W 78th Street Minneapolis MN 55435 (612) 835-6800
TWX 910-576-2832 TELEX 29-0321 CABLE ADCPRODUCT

high-impact thermoplastic inserts plus a choice of either performance-improving silver- or gold-plated contacts. Small wonder these top-of-the-line professional connectors meet or exceed industry standards. Best of all, they're compatible with other audio connectors used in the industry. For information, call or write your nearest ADC sales office listed below. Or call us at (612) 835-6800.

Sales offices in: Atlanta, GA (404) 766-9595 • Chicago, IL (312) 655-2441, 2440 • Dallas, TX (214) 241-6787 • Denver, CO (303) 761-4061
• Fairfield, CT (203) 255-0644 • Los Angeles, CA (213) 594-6160 • Melbourne, FL (305) 724-8874 • Minneapolis, MN (612) 835-6800
• Mountain View, CA (415) 964-5400 • Washington, DC (202) 452-1043 • Montreal, Quebec (514) 677-2869

Circle 34 on Reader Service Card

www.americanradiohistory.com

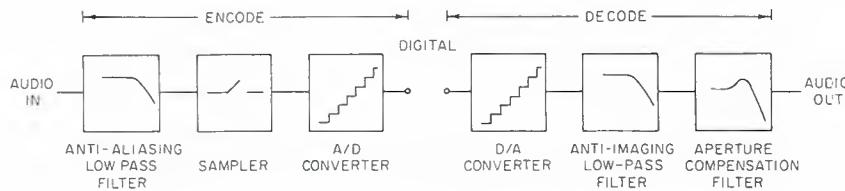


Figure 4. The complete A/D, D/A system.

response. As in photography, the aperture is the size of the opening: pulse width. With the pure samples, the aperture is extremely small and there is no effect. A compensation filter must be included in the decode process to compensate for the effect when a hold is used. The hold is implied by leaving the DAC on between samples.

GENERATION OF IMAGES

Let us return to the subject of the image frequencies and their origins. The audio signal was said to exist only between DC and half the sampling frequency. Where then did the image signals come from? In the previous article we considered the sampling process, and showed that it is able to create the same sampled signal from many different input signals. In particular, a 1 kHz sine wave and a 41 kHz sine

wave, when sampled at 40 kHz, produce the identical result. This is a "mapping" of two (or more) sine waves into the same result. The digital number sequence represents both sine waves. In fact, the same sequence represents 1, 39, 41, 79, 81, 119, 121 kHz. The input anti-aliasing filter resolves the ambiguity by removing all except 1 kHz. However, the digital number sequence does not know that only one possible sine wave could have produced that sequence. At the output, the decoder produces *all* sine waves which could have created that sequence. We design the anti-image filter to allow only the one which we know produced the sequence.

One could have an anti-aliasing filter with a bandpass from 20 kHz to 40 kHz if one also has an anti-image filter which is the same. Such a digitizing system will only pass those frequencies, but the

output frequency will still be the same as the input frequency.

COMPLETE SYSTEM

This completes the introductory discussion on the theory of digital audio systems. The complete system is shown in FIGURE 4. So far, we have done nothing with the digital word sequence other than convert it back to audio. In a real application, the digital sequence is processed in some interesting fashion, such as delay, reverberation, storage, or transmission. A digital tape recorder would record the digital sequence for later playback; a delay system stores and recalls the sequence. A reverberation system is much more complex, since it processes the sequence to create a new digital sequence.

We should also note that the encode process produces all of the theoretical degradation, by the quantization noise of conversion, and bandlimiting, by the anti-alias filter. The decode process produces no further degradation, since there is no quantization and the anti-image filter is the same as the anti-aliasing filter. The former removes audio components, whereas the latter removes images created by sampling.

In the next few articles, we will turn our attention to the actual implementation of the converters. This will introduce us to the real problems of a digital system. ■

De-Essssss

The Orban 526A single-channel Dynamic Sibilance Controller is a *simple*, economical dedicated de-esser—without the complexity and compromises of multi-function processors. It sets up *fast* to produce sibilance levels that sound natural and right. Features include mic/line input, fully balanced input and output, LED level meter, GAIN control, compact size and more. Special level-tracking circuitry assures consistent results with varying input levels. And our control technique doesn't emphasize residual IM when de-essing occurs.

De-essing doesn't have to be complex, expensive, and time consuming. The 526A does it fast and *right* in recording studios, cinema, broadcast and cassette duplication.

The 526A De-Esser is available at your Orban pro-audic dealer.

orban

Orban Associates Inc.
645 Bryant Street
San Francisco, CA 94107
(415) 957-1067

Circle 25 on Reader Service Card

www.americanradiohistory.com



Try your hand-held money machine!

**The Model AT814
Dynamic Vocal Microphone.
Your best capital investment!**



Music may be mostly art. And sound may be based on engineering. But together they're a business. The music business. And the AT814 is a tool. A music business microphone.

We also call it a *vocal* microphone. Not because it can't be used for anything else, but because every detail of design is based on helping your voice to sell. On stage. In front of the paying customers.

The AT814 response is smooth, but it isn't flat. Rather, it's tailored to help you punch through instrumental backing and noise without screaming or forcing. You sound natural. And great.

The AT814 is also designed to work best very close up. The way you want to work. But without spitting, popping, or overload problems. And with a controlled proximity effect which builds bass without booming. Or complements an equalizer to control feedback if you prefer.

Even our cables are special. With a conductive coating on both interior wires to make them some of the lowest-noise cables in the industry. And built to take repeated flexing without failure.

And the AT814 is STRONG. In capital letters because it's so important. Our windscreens are three structural layers of mesh, soldered (not glued) and backed up by foam. In every respect, the AT814 is built to deliver. Night after night. Town after town. Because you can't afford a reputation for bad sound anymore than we can.

We can't promise the AT814 will make more people like your singing. But we can promise they'll hear you at your best. And once you've tried the AT814, we think you'll sing its praises too. At leading music stores everywhere. Try one today! AUDIO-TECHNICA U.S., INC., 1221 Commerce Drive, Stow, Ohio 44224. Dept. 90BD. In Canada: Audio Specialists, Inc., Montreal, P.Q.

audio-technica[®]

Great sound right from the start!

Circle 28 on Reader Service Card

Voice Prints and Stress Analysis

What is a voice print? It is an everyday term for a sound spectrogram of a person's voice, continuously taken through time. Does this mean you can read a voice print? Now that depends on

what you mean by "read." With some practice, you can recognize patterns that represent specific words and thus, from memory, you will know those words again on the voice print. But a great deal

more practice would be needed before you could construct words from your knowledge of the way sounds go together, rather than by simple recognition.

A SOPHISTICATED "ID"

Now, voice prints have been used as a sophisticated form of identification. A person says a name and the machine recognizes if it's the owner of the name, or someone else, saying it. Only the owner's way of saying it will be accepted as "authentic" by the machine.

Now, think about listening to different people saying the same name. They all say it differently, and the voice recognition machine can detect such differences, when compared with a permanent voice print of how the person himself says it. But, given that it could tell when you say your name, or when I say mine, could it tell if it was you saying mine, or I saying yours? Only if those specific voices, saying those specific names, were programmed into it. It could not tell, at the present state of the art, merely from prior inputs consisting of each of us saying our own names.

STRESS ANALYSIS

That's a little of what voice prints can do. Now what about stress analysis? What does a stress analysis machine do? It must work with the same spectral content, but process it in a different way. It is not concerned with recognizing the words you say, but with recognizing whether you are in a relaxed or tense state when you say them.

Research has found that subtle changes in the way the vocal chords work occur with nervous tension, as compared with when the person is relaxed. What does this mean? A person's voice rises and falls in pitch, some more than others, in the normal course of speech. It may be for emphasis or some other purpose. That, in itself, does not reflect tension or relaxation. Tension tends to make a person's voice what you would subjectively describe as "edgy."

How can voice analysis tell that? Not so much by frequency content, as by frequency combination in that content, just as in music. Strident sounds result from inharmonious combinations of tones, while melodic ones result from harmonious combinations. This means that any such detector must first frequency analyze the sound, and then apply the output from such analysis to some form

the ULTIMATE EQUALIZER—

Soundcraftsmen's NEW

SCAN-ALYZER/EQUALIZER

MADE IN U.S.A. \$499
Model AE 2420-R.
Including Case.

GUARANTEED to improve — and enhance — any fine stereo component system!

The Patent-Pending DIFFERENTIAL COMPARATOR circuitry of the "SCAN-ALYZER"/EQUALIZER IS THE KEY TO HIGH PRECISION ACCURATE EQ analysis. The basic simplicity of the DIFFERENTIAL COMPARATOR circuitry makes it possible for even a novice to accurately EQ his room and his system, yet that same circuitry is so highly accurate it can actually be used for 0.1 dB laboratory measurements in EQ analysis. This combination of

equalizer and analyzer creates a functional component that should be an integral part of every high quality home stereo system. The "SCAN-ALYZER"/EQUALIZER with its accompanying COMPUTONE CHARTS, can be used in a home stereo system for so many important functions we can't begin to list them here. See your nearest Soundcraftsmen dealer, or circle Reader Card, for complete information.

5 EQUALIZERS from \$249 to \$550



SE450 — S LVER OR BLACK \$249.

3 STATE-OF-THE-ART PREAMPS, \$399 to \$699



SP4001 \$549

3 CLASS H 250w AMPS from \$649 to \$949



EA5003 \$949.




RP2201-R \$299.



SP4002 \$699.

MA5002 — \$799
PA5001 — \$649 — (Not Shown) \$44

RP2215-R \$370.

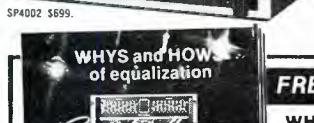

TG3044-R \$550.

FREE! 16-page Full-Color Brochure

WHYS and HOWS of equalization



Includes TEST REPORTS, complete specifications, Class "H" amplifier, ENGINEERING REPORT, EQ COMPARISON CHART, and the "WHYS & HOWS" of equalization—an easy-to-understand explanation of the relationship of acoustics to your environment. Also contains many unique IDEAS on "How the Soundcraftsmen Equalizer can measurably enhance your listening pleasure." How typical room problems can be eliminated by Equalization, and a 10-POINT "DO-IT-YOURSELF" EQ evaluation checklist so you can FIND OUT FOR YOURSELF WHAT EQ CAN DO FOR YOU!


SEND \$6.00 FOR EQUALIZER-EVALUATION KIT: 1-12" LP TEST RECORD, 1 SET OF CHARTS, 1 CONNECTOR, 1 INSTRUCTION FOLDER
Made in U.S.A. by SOUNDCRAFTSMEN INC. • 2200 South Ritchey • Santa Ana, CA 92705 U.S.A.

Circle 13 on Reader Service Card

NEI

about sound people

We believe in continuously incorporating the very latest proven electronic advancements into our equipment. NEI engineering refinement yields configurations that are simple and clean. Sophisticated analyzers, crossovers, equalizers and mixers at affordable prices. Design your sound with NEI.

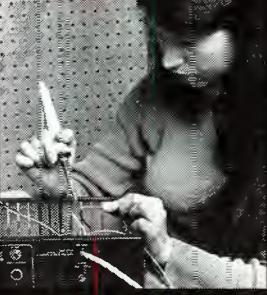

Circle 18 on Reader Service Card

NEPTUNE ELECTRONICS, INC.

934 N.E. 25th Avenue

Portland, Oregon 97232

503/232-4445

www.americanradiohistory.com

of logic circuitry, that functions on the basis, not of the frequencies present or absent, but on the relationship between the frequencies present.

If you are an experienced listener, perhaps you can tell the same thing that a voice stress analyzer can just by listening to the voice itself, in much the same way a musical conductor assesses the performance of his musicians. Advocates of stress analyzers, for the most part, want us to believe that the machine is "smarter than the average ear," with apologies to Yogi. All we can say is that a stress analyzer removes the result from the subjective realm—the opinions of various listeners—to an objective realm—a precise indication on a meter or indicator of some sort.

DON'T JUMP TO CONCLUSIONS!

But beware of jumping to the conclusion that because the result is objective, it is infallible, as regards determining whether the person being analyzed is lying or telling the truth. Tain't necessarily so!

First, any machine that will reliably detect stress, or the absence thereof, in a particular person's voice, must first be calibrated to that person's voice. Some people's voices are more strident when they are relaxed than others are when they are under tension. This is just a characteristic difference between individuals,

and is no indication that one person is normally more tense than another.

So, you've calibrated the machine, using the procedure specified by the manufacturer, and you have tested it by having the subject say something both of you know to be true, and also something you both know to be a lie. Good, it indicates for this subject. Now, can you be sure the result is reliable?

The point to remember is, all it can really tell you is whether the question you ask the subject *causes* stress. And stress can definitely be brought on by reasons other than lying. In Victorian times, the word "sex," particularly used in mixed company, would have caused stress. Would the responses achieved indicate that the people present were lying about something? Not necessarily: it would just indicate that a taboo word had triggered stress. And there could be other reasons for a similar response, perhaps individual to specific subjects.

IN RELATION TO AUDIO

How does all this affect audio, and what we may be able to do in the future? It may help to get us thinking about the parameters involved. Perhaps a voice stress analyzer could be adapted to determine whether a specific person, for whom the device has already been calibrated, or someone else, is speaking in a specific piece of sound track.

On solo sounds, it would be possible to modify the same technology to determine what musical instrument is being played, and possibly, even to identify the musician playing it, from something equivalent to his "style." But that is still a long way from being able to isolate such a sound, in a complex sound channel, obtained from a full orchestra, playing at once. This is a capability a musical conductor can acquire and maybe, down the road away, technology will find a way to duplicate that capability.

DUPLICATING HUMAN HEARING ABILITY

So far we can distinguish three basic systems, with variations, each of which partially duplicates an ability of human hearing. A voice print gives a visual print-out of any source of sound, as a spectrum of changing frequency content against time. With some skill, which must be acquired from working with them, you can "read" them. You may be able to detect a difference between the voice prints of different people saying the same thing, but you would be hard put to identify who was speaking, without such a constraint of having them say the same thing.


A second system is based on providing it with an electronic memory, whereby it can remember the precise voice print



- Fast 60 ips duplicating speed
- Two-minute tape loading
- Glass bonded ferrite heads
- Three-year mechanical warranty
- Common capstan eliminates speed variance between master and slaves
- Compact, self-contained console
- 100% solid-state integrated circuitry

Look to Garner for quality electronic audio and video products. For more information, write or call: **GARNER INDUSTRIES**

4200 N. 48th St., Dept. DB-9 Lincoln, NE 68504 • Phone 402-464-5911

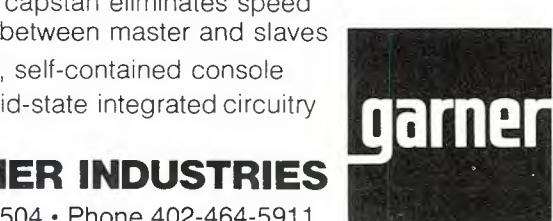

JBL's new 7510.

The automatic mic mixer that thinks before it speaks.

JBL

JBL's new 7510 advanced digital/analog mic mixer actually thinks before it speaks—by activating or deactivating up to 24 input channels. Automatically. Now, you don't need an operator to constantly adjust controls. The 7510 does it all. Quickly, precisely and without error.

Versatile modular design makes the 7510 an all-around performer. In churches, meetings, courtrooms and council chambers. Delivered with a single, 4-channel input module, the system is expandable to 24 channels. And each panel features controls for level, threshold, release time and mode selection.

The 7510 offers a variety of other advantages over conventional mic mixers. Automatic mic on/off

and output level correction permit hefty power gain without the "howling" of feedback. Turn-on features a zero crossing detector. So there are no pops or clicks!

Advanced level sensing circuits trigger extremely fast attack—30-60 nanoseconds. This quick rise makes it ideal for gated mixing. The 7510 offers separate outputs for every input. So the user can program to match each need. When in the priority mode, all inputs in automatic are muted by selected lead mics.

At the same time, a unique digital attenuator decreases the system's output gain by 3 dBs each time the number of live mics doubles. The feedback stability margin remains constant regardless of the number of mics.

operating. And the system's threshold circuits can distinguish between program signals on one mic and ambient noise on all mics to within 1 dB.

Other features include 48-volt phantom power supply. Master VU meter. And the system fits easily in three EIA rack spaces. The 7510's low distortion, low noise, flat response and wide input dynamic range make it perfect for all sound reinforcement applications. It's also ideal for noise gating in recording studios and for broadcast and live music reinforcement applications.

JBL's 7510 delivers what it promises.

James B. Lansing Sound, Inc., 8500 Balboa Blvd., Northridge, CA 91329.

Frequency Response

Input Module	20 Hz-20 kHz ±0.5 dB
Output Module	20 Hz-20 kHz ±0.5 dB
Overall System	20 Hz-20 kHz ±0.5 dB

Maximum Gain

Overall System	≥ 80 dB
----------------	---------

Main Output Characteristics

Maximum Output	+23 dBm
Load Impedance	600 Ω or higher loads

Total Harmonic Distortion

Mic In to Direct Out	0.2% maximum 35 Hz-20 kHz
Mic In to Main Out	0.2% maximum 35 Hz-20 kHz

Automatic Mic Functions

Input Rise Time	30-60 nS
Input Release Time	100 mS to 5 S, adjustable

JBL First with the pros.



Circle 40 on Reader Service Card

www.americanradiohistory.com

of a particular person saying his own name, and use that memory to reject the print of anyone else saying the same name. Data on the precise voice print can be entered in a magnetic memory on a card, similar to a credit card, which is inserted in the machine, while the presenter of the card says his name into a microphone.

Thus, such a machine is a form of comparator: it compares the voice print of the freshly spoken word into the microphone, with the recorded print presented to it on the card; but it has only two results; go and no-go. If the two match, the person is identified. If they don't, he is rejected as an imposter.

The third kind of machine is the stress analyzer, often called a "lie detector." This analyzes the prints a little differently. It does not seek identity or non-identity, but rather certain qualities about the print. To do this, it must in some way be "calibrated" to the individual being "tested," usually by having him state some already verified fact, which the operator knows to be true, and then getting him to say something he knows to be false. It uses differences about the print that have been found to be indicative of the state of stress under which the person speaks.

Because it needs calibrating, it obviously has the basic capability of telling

the difference between individual voices, although it is not set up to do that, like the security device is. So all three duplicate part of human hearing capability. All three start by producing a frequency analysis of sound over time, in a form that could be presented as a voice print.

THE AMAZING HUMAN HEARING FACULTY


This leads us to conclude that the human hearing faculty has an infinitely better memory system than any of them. We can hear what a person says, and if we have heard that voice before, we can also identify the person saying it. We recognize words we have heard before, perhaps many thousands of them, and can interpret them into meanings (rightly or wrongly). A person transcribing a dictated message can "translate" those sounds into visual symbols, such as those you are now reading.

Efforts are being made to produce a reliable transcribing machine. One of the main problems is that of accommodating a wide variety of different voices, still recognizing the same set of words, in a large enough vocabulary.

Human hearing accepts all signals picked up by the person's ears, and processes them. It has the ability to ignore non-relevant sounds, according to the way the person's "listening" faculty programs it, even ignoring sounds that occupy the same frequency spectrum as those being listened to, by using pattern recognition. To do this, it must have some way of telling what frequency components "belong together" as parts of the same sound: the voice of the same person speaking.

How does it filter off—or whatever would be the appropriate term—just those elements within the common spectrum that all the sounds being picked up are using, and identify them as that particular person's voice? To the best of our knowledge, this is a capability that technology has not been able to duplicate, as yet. To do any of the things we have been discussing, the machine must be provided with the sound to be analyzed, pretty well isolated from all other sounds. Does anybody have any answers to this?

MAKE YOUR SOUND SYSTEM FAIL SAFE

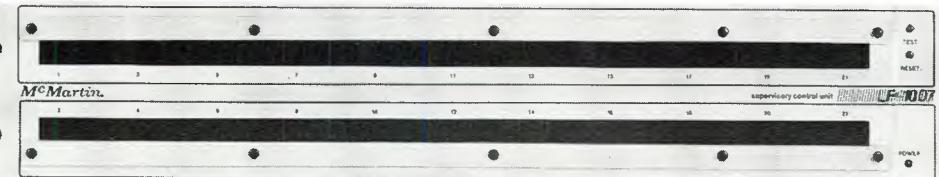

McMartin LR-1007

The McMartin LR-1007 Supervisory Control System continually monitors a complex sound system in order to detect component failure. Automatic switching circuits disconnect defective devices and reconnect standby units.

A *remote annunciation* feature permits a central monitoring room to be used for fault detection of one or more remotely located sound systems.

The LR-1007 uses a modular design that can be configured for a wide variety of installation requirements. Write for complete information.

"McMartin is what you've been looking for"

MC MARTIN

McMartin Industries, Inc. • 4500 S. 76th St. • Omaha, NE 68127 • (402) 331-2000 • Telex 484485

Copies of db

Copies of all issues of **db—The Sound Engineering Magazine** starting with the November 1967 issue are now available on 35 mm. microfilm. For further information or to place your order please write directly to:

University Microfilm, Inc.
300 North Zeeb Road
Ann Arbor, Michigan 48106



The Greatest Radio Event Of 1980

October 5-8, 1980

Bonaventure Hotel Los Angeles, California

- Specially-Selected Speakers And Sessions To Prepare You For The Unique Communications Challenges Of The 80's
- Giant Exhibit Area—You'll See The Tools Of Tomorrow
 - Learn The Latest American Lifestyle Trends
- Ratings Clinic: "Last-Minute Fine-Tuning For The Book"
 - Superstar Concert
 - Multimedia Shows And Movies
- Special "American Radio Expo" Awards Presentations
 - Large And Small Market Sales Clinics Featuring "New Methods For Co-op"
 - Radio Vs. Records: "The Copyright Debate: Should Radio Pay To Play?"
 - Formats — The Present And Future:
Top 40, AOR, Black, Beautiful Music, Country, Pop Adult, News/Talk
 - Promotion In The 80's: Covering Everything From Letterhead To TV Spots
 - Participate In A Futuristic "Delphi Study" Of Our Industry
 - The Latest From The Networks And Syndicators
 - FCC & Engineering Panels
 - Hospitality Suites

And So Much More...

Registration Information

RETURN TO: NRBA • 1705 Desales St. NW • Washington, D.C. 20036 • (202) 466-2030

Please Print Or Type

Name(s) & Title(s): _____

Station(s)/Company: _____

Address: _____

City/State/Zip: _____

Phone: _____

FEES *

NRBA MEMBERS	
1st registrant	\$150.00
each add'l. registrant	\$130.00
NON MEMBERS	
1st registrant	\$190.00
each add'l. registrant	\$170.00
SPOUSES	
	\$ 50.00



NOTE Pre-registration deadline is September 25. After September 25, registration will be handled on site.
* There will be an additional charge of \$25 per person for registrations received after September 1st.

Please use separate forms for each room requested.
This form may be duplicated.

Name(s) & Title(s): _____

Station/Company: _____

Address: _____

City/State/Zip: _____

Phone: _____

Arrival date: _____

Departure date: _____

Please circle preferred type of accommodation:

Single	Standard \$57	Medium \$67	Deluxe \$77
--------	---------------	-------------	-------------

Twin (2 beds)	\$69	\$79	\$89
---------------	------	------	------

Double (1 bed; 2 people)	\$69	\$79	\$89
--------------------------	------	------	------

NOTE NRBA is processing initial hotel reservations as a convenience to registrants.

To change or cancel your hotel reservations you must do so directly with the Bonaventure Hotel (213) 624 1000.

If rate requested not available, nearest available rate will be assigned.

Reservations will be held until 6:00pm unless guaranteed by a first-night deposit (payable to hotel) or a credit card.

Credit card type & # _____

Expiration date: _____

* For Guaranteed Reservations Only

I understand that I am liable for one night's room and tax which will be deducted from my deposit or billed through my credit card in the event that I do not arrive or cancel on the arrival date indicated.

Signature: _____

db Sound With Images

Film vs. Video

- American standard television relies on 525 scanning lines of electron dots to fill a screen anywhere from two inches diagonally on up to ten feet and more, if you include the huge projection systems used in theaters. The horizontal

resolution of the typical $\frac{3}{4}$ -inch video system is approximately 260 lines in color and 330 lines in black-and-white. This adds up to about as many bits of information as a fast 16 mm film stock; that is, a film that can be used with

available natural light. (Film's dynamic range of bright-light-to-darkness is far greater than video's, in any format compared.)

Much professional film production is done in 35 mm, creating images with a resolution far better than anything video can reproduce. Confusingly, for film production done exclusively for showing on television, producers still prefer the 35 mm format, even though this difference in quality cannot be reproduced. Why?

Could it be the audio portion? (Not yet a crucial part of the television experience.) Most audio on film is still rendered (perhaps "rended" is a better word) in the final product into "optical sound," the recording device invented back in the early twenties by Lee De Forest. This capacitance system has severely limited dynamic range (about 500 to 14,000 Hz), and ages quickly. As the film gets dirty or scratched, which is inevitable with hard celluloid, you hear it. Historically, film-sound has been so bad that one didn't even mind the horrors of "mag stock," or the hard, celluloid-backed, sprocketed, magnetic tape that was used to maintain sync with the pictures. The hard backing and sprocket-popping degrades the response, even before the sound gets transferred to optical. In the 16 mm format, slow transport speed also contributes its share of damage.

In contemporary film production, the final sound is often recorded on a "mag track" instead of optical, particularly in any feature film claiming to have better than average stereophonic sound, Dolby sound, etc. Still, the width of each sound stripe involved (0.063 inches) is somewhat thinner than a single track on a pro-audio multi-track tape recorder (0.070 inches). (For more on various sound track formats for film, see the March 1980 db—Ed.)


Of course, as I pointed out in my last column, sound on video tape is no better, and sound on television is even worse. Yet, both have high capabilities, and should improve rapidly. For the time being, however, quality of both picture and sound remains on the side of film. But the larger reason why film is used more often for programs to be televised probably lies with force of habit.

Time was, video equipment was all bulky stuff that did not lend itself to location work. Of course, time was that film equipment was zip-locked in that same bag. But film broke out of the studio about 1960, while video is just now beginning its break-out with smaller, more portable equipment. In fact, with fine video cameras about the same size as 35 mm cine cameras, and with the same degree of lighting needs, and VTRs down to manageable size, video now rivals film's convenience factor.

And, video has a few added conveniences of its own. Electronic editing has just spread to the audio world, and

Pick your signal

VIZ means value...DC to 40 MHz —

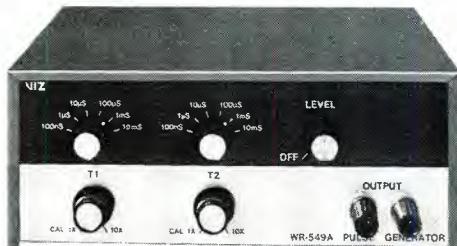

Pulse Generator WR-549A \$130

- Ideal for logic design or digital circuit trouble shooting
- Output 5 Hz to 5 MHz $\pm 5\%$, 0-15 V into 600Ω , 0-6 V into 50Ω
- Pulse width adj. 100 ns to 0.1 sec., rise and fall time 20 ns
- TTL and CMOS compatible, on and off time independently adj.



Function Generator WR-550B \$150

- Sine, sawtooth and square wave output, 1Hz to 1MHz
- Output 0-20 V peak to peak at 600Ω plus 10 V adj. offset
- 10 to 1 freq. sweep with ext. sweep voltage of any wave form
- Freq. stability 200 ppm/ $^{\circ}$ C
- Accuracy to 100 kHz $\pm 5\%$ of dial. Above 100 kHz, $\pm 8\%$
- Separate fixed 4 VDC square/sawtooth wave outputs compatible with TTL and CMOS.



Audio Generator WA-504B/44D \$139

- Switch selectable sine or square wave output
- Output 20 Hz to 200 kHz in 4 ranges
- Stability better than $\pm 0.5\%$
- Voltage output 4 ranges .01 to 10 V at 600Ω
- Sine wave harmonic distortion 0.15%
- Square wave rise and fall 150 nsec. Tilt 2%

See your VIZ distributor



RF Generator WR-50C \$130

- RF output tunable 85 kHz to 40 MHz in 6 ranges
- Special sweep output at 455 kHz and 10.7 MHz, plus external xtal
- RF output .05 V rms, 2 step 10 to 1 plus fine adj. attenuator
- Internal modulating freq. 600 Hz adj. to 80%
- Audio output 6 V rms across $15\text{ k}\Omega$ load
- FET amplifier for rugged stability



VIZ Mfg. Co., 335 E. Price St., Philadelphia, PA 19144

Over 70 test instruments in the line

Circle 26 on Reader Service Card



Kenny Gordon
Sound and Lights
Grand Rapids, Michigan

"Bose® 802s are amazing speakers."

Rather than blowing our own "horn" and describing how the Bose Model 802 speaker system does away with awkward horns and bulky bass cabinets that are nightmares to use—we've decided to let one of our enthusiastic, satisfied dealers do the talking:

"For me, the basic advantages of the Bose 802 over any other type of speaker system are sound and size. Most of my customers want speakers that sound good and don't spoil the show by drawing attention to themselves.

"I am very conscious of sound . . . I was a professional musician before I became a dealer. As a performer and a listener, as well as an installer, I would never sacrifice good sound for size. If I felt a speaker had to be big to give a big sound, I would choose it over a smaller one. But Bose 802s are amazing speakers. Bose provides intimate, living-room, high-fidelity sound for the listener—never the offensive, listener-fatiguing type of sound that you often get from a horn-loaded sound system.



"Another fantastic thing about Bose is that I never worry about the 802 blowing up. That's quite a contrast to some of the compression drivers I have used. In this business, the operators often don't understand how much the systems can take and they get abusive. Bose 802s can take just about anything those guys hand out.

"Several years ago, when I decided to go into the business of selling and installing sound and lights, I wanted to take on a line I really believed in—one that really did what it was supposed to. With Bose, I've done that."

We can't promise you'll rocket to stardom when you use Bose. But we can promise that your audiences will enjoy your music without going home with a headache. The rest is up to you.

BOSE
Bose for Pros.

Bose Corporation, Dept. SE
The Mountain
Framingham, MA 01701

Please send me a copy of the Bose Professional Products Catalog and a complete dealer list.

Name: _____

Street: _____

City: _____

State: _____ Zip: _____

Tel. () _____

Covered by patent rights issued and/or pending
© Copyright 1980 by Bose Corporation.

most of us are familiar with the incredible advance this represents over the age of the ragged razor blade and greasy fingers. Film is necessarily still in that ragged age: the editor may use a three-screen, programmable Steenbeck editing bench, but in the end, he physically "cuts the plastic," a step unnecessary in video. In fact, here video's usually-overrated higher equipment cost is evened out: the hardware to edit video (one editing deck, controller, processing amp, and perhaps a console) is much cheaper than the finest film editing equipment. Without the finest possible editing, film's advantage in quality is thrown away. Not a problem with video.

The convenience of the 3/4-inch cassette should not be underestimated. On a film set, there's usually a crew member whose sole job it is to make sure the camera's magazines are loaded; and those magazines, in 35 mm, won't usually roll for more than twenty minutes. Much more importantly, the convenience of seeing what you've got on tape as soon as you've got it is still something the medium of film can't match, though Polaroid is trying.

Film and videotape are about equally difficult to duplicate, but if the film has a magnetic sound stripe, that's an extra step—and that takes longer. Speaking of which, it is our understanding that

another reason mag striping never really caught on is that films are still shipped—by mail or equally-destructive courier—in cans, and are easily demagnetized or remagnetized. Video tape would also have this problem, and therefore is a bit less convenient to distribute than optically-striped film.

But on the distribution end, there is a psychological factor working in video's favor. People are getting used to watching television, and coming to prefer it to sitting in a darkened, more formal room. At corporate conferences, sales meetings, in-house teaching, in schools, and indeed in all the domains of the industrial film, the public is coming to demand video, not film. Could this not also represent a general belief in video as more technologically advanced?

It is, of course. And if films at present record images with more quality than videotape, they record that image as well as they are ever going to. While advances such as the Steadicam, better dollies, and smaller lights benefit both video and film, the film itself, and its basic hardware, is at the top of its technology. There will never be better contrast or color represented on film than there is now, and a supportable position in debate is that the first Technicolor feature films produced better—perhaps more-interesting is the word—color than today's processes. Certainly film and film equipment will never be more cheap and available than they are today.

Video may not have the quality of the best of film just now, but it will in the future, for video is at the beginning of its growth curve. We say "video" advisably, and not "videotape," because much of that growth in quality will come from the videodisc, and eventually from direct computer storage of information.

Make no mistake about it (here comes the auspicious pronouncement), the videodisc represents as much of a superior technology to videotape as magnetic tape does to film. (The capacitance recording, stylus-in-groove, mechanical system soon to be marketed by RCA and its licensees, with all its inherent mechanical imperfection, and with lousy mono sound, is not what we are referring to, and hopefully it will fall by the wayside soon—sorry about that, RCA.) We speak of those video systems that use the laser—probably, more than atomic energy, the greatest discovery of our time. Aside from zapping some future Starship Enterprise, the laser is the recording apparatus of Philips/Magnavox's new disc, and provides striking improvements in the recording of both picture and sound, bringing both up to the level of the highest quality film and digital audio.

Next time, we'll get back to solid engineering ground, as we unravel the mysteries of the Time Base Corrector. ■

BIGGER PROFITS PROVEN PRODUCT VAST MARKET

AEI Foreground Music offers substantial new opportunities for increasing your sound contracting business and your cash profits. Our program combines high-profit equipment sales, continuing monthly music residuals, warrantied equipment, and satisfied customers. We've got the whole package — and the best one. Just send us the coupon for our free literature on how easy it is to become a well-paid AEI dealer.

**Audio Environments Inc.
619 East Pine Street Seattle, Washington 98122 206/329-1400**

I want to know more about the AEI Foreground Music program.

name

address

city

state

zip



Circle 14 on Reader Service Card

MONEY MACHINES



crown


Crown power amplifiers are designed to help you make money.

They work—reliably. That's been proven in over thirty years of supplying these amps to the professional sound industry.

They build your reputation.

Crown is used for speaker power in more recording studios than any other brand, and by all of the major mobile sound reinforcement contractors.

You are known by the good company you keep.

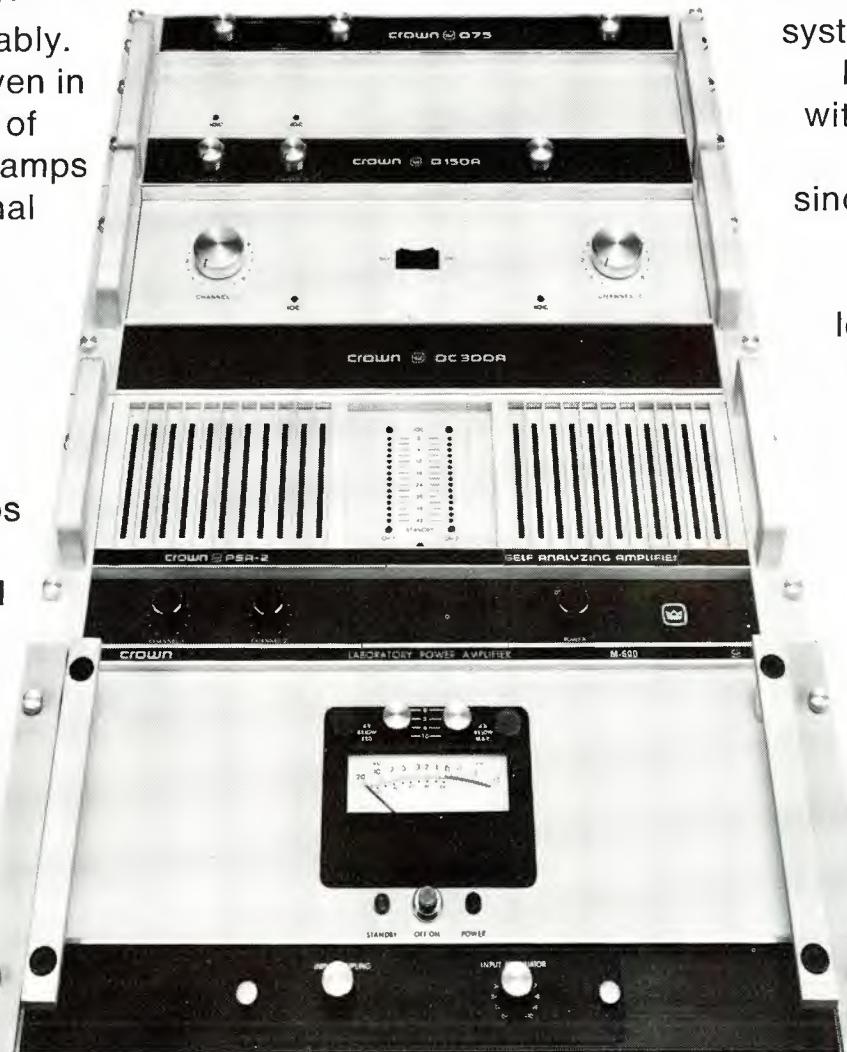

Crown amps help you meet the demand for better sound systems. Crown has been concerned with full-band high fidelity sound since our founding.

We have been preparing for a long time to help you build better sound systems for the discriminating demands of the '80's.

For more information, send us the coupon.



crown

1718 W. Mishawaka Road, Elkhart, Indiana 46514

Innovation. High technology. American. That's Crown.

TO: CROWN INTERNATIONAL
1718 W. Mishawaka Rd., Elkhart, IN 46514

Name _____

Company _____

Address _____

City _____ State _____ Zip _____

Phone Number _____

db New Products & Services

SPECTRUM ANALYZER



- The Model SA-91 Audio Spectrum Analyzer offers a cost-effective way of obtaining high resolution by offering 1/9-octave resolution at a price usually equivalent to 1/3-octave analyzers. A single, sharp voltage-controlled filter is swept over the entire audio spectrum to obtain 1/9-octave resolution in 91 bands over a 20Hz to 20kHz range. Dynamic range of display is 20dB in 101 distinct 0.2dB points. This analyzer is useful with any equalizer. The internal memory can store two complete frequency response curves.

Mfr: Spies Laboratories

Price: \$1195

Circle 50 on Reader Service Card

GAIN REDUCTION AMPLIFIER

- The Model 3320 Gain Reduction Amplifier has only one operating control, Range Reduction, calibrated in dB. Output peaks remain constant under all Range Reduction settings once the Input and Output presets are adjusted to the desired bus level. The Model 3320 is a panel mounting unit 5 1/4-in. high by 1 1/2-in. wide and 5 3/4-in. behind the panel. The 3320 requires a bipolar 15 volt dc supply.

*Mfr: Modular Audio Products
Circle 51 on Reader Service Card*




PATCH BAY

- The PB 2896 patch bay system features 16 stereo inputs and outputs with 64 gold-plate phono connectors on the rear panel and 3-conductor Bantam jacks on the front. The fully-normalled design means that no patch cords are necessary for normal system operation. Internal switches are also provided to disconnect "normals" on components not normally hooked up in the system. Able to fit into a 19 in. rack space, the patch bay offers a PBX22 stereo balanced bridging adaptor, PJ713G gold-plated patch cord, and other options.

Mfr: Audiovisual Systems

Price: \$650.00

Circle 52 on Reader Service Card

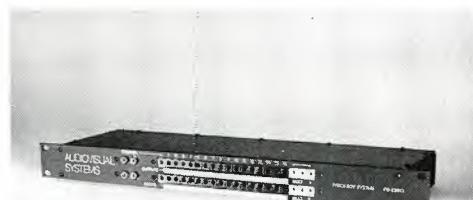

WOW!!

AUDIO TRANSFORMERS

114 Different Types!

In Stock!

And Priced Right Too!



World Famous Sescom "MI-Series" Transformers for Professional Audio Applications

Send for your FREE 1980 Catalog

SES COM, INC.
Professional Sound Division
(702) 384-0993
(800) 634-3457
1111 Las Vegas Blvd. North
TWX 910-397-6996
Las Vegas, NV 89101 U.S.A.

Circle 32 on Reader Service Card


AUDIO MIXING CONSOLE

- The Series 700 marks a new line of recording consoles. The first product is a 36-in, 16-out, console with four effects outputs, two foldback outputs, stereo control room and studio monitor outputs, designated the Model 720. The mainframe contains a modular plug-in jack bay with 432 jacks. It also contains 24 VU meters that indicate all the console program outputs. Other features of the 720 include transformerless microphone preamps, three-band parametric-type equalization, and VCA input subgrouping.

Mfr: Audiotronics

Price: \$41,000 to \$63,000

Circle 53 on Reader Service Card

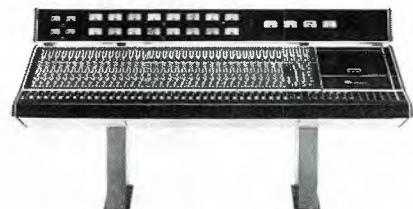

MOBILE CONSOLE

• Technics has introduced a rugged, totally mobile professional turntable console that features the quartz-phase-locked direct drive system. The Model SL-9560 is a stereo (or mono) phono disc reproducer designed for professional applications. The unit consists of two highly sophisticated, acoustically isolated sections: the turntable and tonearm/cartridge "deck" section, and the control illumination "main" section. The deck section includes a direct-drive turntable featuring a gimbal-suspended tonearm, which incorporates a professional quality moving coil cartridge. The control section consists of a phono-equalizer amplifier with a high pass filter, tone controls and a monitor amplifier with speaker.

Mfr: Panasonic

Price: \$6,565.

Circle 54 on Reader Service Card




MIXER

• The Series 200-8X2 is intended for both film and TV use as well as for all mono or stereo recording or mixing applications requiring a small, (13" x 17.5" x 7") battery-operated mixer. The 8X2 will operate approximately 20 hours from an external rechargeable Gel-Cell battery pack (supplied) or any 12 volt source. Among the inputs included are ones for phantom power, phase reverse, cue and echo sends, 4-position input gain set switch and three equalizers with 4-position mid frequency select. Two standard VU meters, ganged Duncan master fader and phones monitor are on the master panel.

Mfr: Interface Electronics

Circle 55 on Reader Service Card

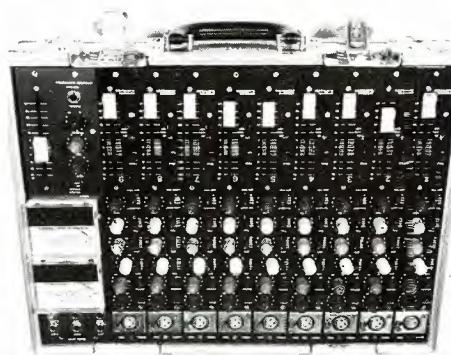

MIXING CONSOLE

• Series 4 (four output buses) is a new line of mixing consoles offering optimum features and performance for both sound reinforcement and four or eight-track recording sessions. Offered in either 12 or 20 input fully-modularized frame, some of its features include: transformerless input circuitry; three-band, continuously-variable equalization in each channel; peak LED and 20 dB pad on each input; eight independent returns, PFL, and six bus assigns through submasters (4) and R/L stereo buses; and full provision for multi-track monitoring and assign.

Mfr: Tangent Systems, Inc.

Price: \$2800.00

Circle 56 on Reader Service Card




STANDARD TAPE MANUAL



This valuable data book is for the AUDIO recordist, engineer or designer. Offered at \$45.00 you may order direct from publisher.

MAGNETIC REPRODUCER CALIBRATOR

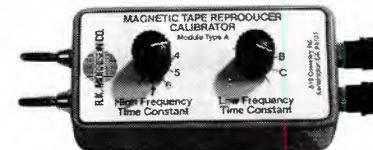

This is induction loop equipment of laboratory quality for primary standardization of tape recorders and tapes. Send for detailed information, prices and formats.

R. K. MORRISON ILLUSTRATIVE MATERIALS

819 Coventry Road
Kensington, CA 94707

Circle 43 on Reader Service Card



REEL TO REEL TAPE

Ampex, 3M. All grades.
On reels or hubs.

CASSETTES, C-10-C-90

With Agfa, TDK tape.

LEADER & SPLICING TAPE EMPTY REELS & BOXES

All widths, sizes.


**Competitive!
Shipped from Stock!**

Ask for our recording supplies catalog.

Polyline Corp. 312/298-5300
1233 Rand Rd. • Des Plaines, IL 60016

15

Circle 39 on Reader Service Card

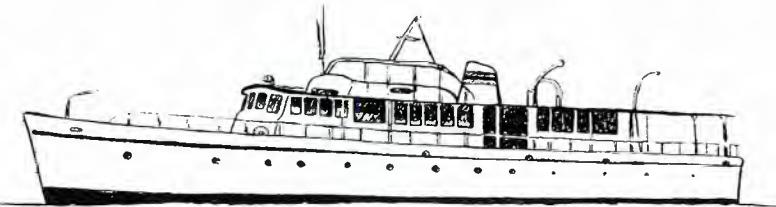

Join db, on a two-week
South American Adventure
to

THE GALAPAGOS ISLANDS AND MACHU PICCHU

February 22 to March 8, 1981




Editor John Woram and publisher Larry Zide invite you to join them, aboard a luxury 16-passenger yacht for a week-long visit to Darwin's incredible "enchanted isles"—the Galapagos Islands—600 miles off the coast of Ecuador.

Then, we fly to Peru, to visit Lima, Cuzco, and the celebrated Inca citadel of Machu Picchu.

For more information, write to

SAGAMORE PUBLISHING CO., INC.
1120 Old Country Road
Plainview, New York 11803

Or phone: (516) 764-8900



**mikes by mail? for less?
why not!™**

and much more!

The Mike Shop™ now sells audio equipment
as well as mikes by mail! for less!

Write or call us with your requirements or for our price sheet.




The Mike Shop™

PO Box 366A, Elmont, NY 11003 (516) 437-7925
A Division of Omnisound Ltd.

Circle 46 on Reader Service Card

REVERBERATION SYSTEM

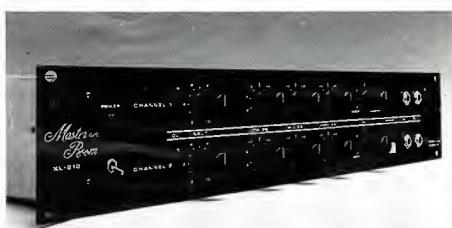

- The Master-Room XL-210 incorporates a recent technological breakthrough that provides the highest quality reverberation at an affordable price. The XL-210 is a self contained 3½-inch rack mount unit that features two completely independent stereo channels that are easily switchable to monaural operation. Input and output connections are via ¼-inch phone jacks located on both the front and rear panels. This unique feature allows convenient break-in patching at the front panel without disturbing the permanent rear panel connections.

Mfr: MicMix Audio Products Inc.

Price: \$950.

Circle 57 on Reader Service Card

SIGNAL PROCESSING



- A new modular signal processing system, the 900 series which includes a noise gate, de-esser and compressor, was recently introduced. The series features convenience with flexibility. Up to eight signal processing modules can be fitted into a rackmount unit measuring just 5¼-inches high. Designed for fast installation, standard connectors enable the rack to be wired easily into a system. The interchangeable signal processing modules slip in and out in seconds.

Mfr: dbx, Inc.

Circle 58 on Reader Service Card

EXT MONTH, the National Radio Broadcasters Association holds its annual convention (Los Angeles, Bonaventure Hotel, October 5-8). In honor of the event, we devote this month's **db** to a look at various aspects of broadcast audio.

Usually, we tend to think of pro' audio as something that happens in the recording studio. After all, recording engineers are into audio, while broadcast engineers concern themselves with, well, broadcasting.

Broadcasting what? Why, audio of course; for example, your very next chart-buster: the one that hasn't got a chance unless it gets plenty of air play.

After recording, mixing and mastering, your potential hit record will surely encounter some "we'll fix it *after* the mix," when (and if) it arrives at the broadcast studio. Some stations have their own special "sound," while others simply try to be the loudest game in town. In either case, your priceless master is in for even more processing, which will hopefully keep those listeners tuned in.

But how much processing? Eric Small has come up with a means of "modulation analysis" in which he quantifies what goes on just before the transmitter. Using the New York marketplace as his guinea pig, he makes some interesting comparisons between stations from his lab, somewhere in the wilds of darkest Brooklyn. Barring an offer he "can't afford to refuse" from some program director, Eric will probably show up in your home town, as he goes about Measuring the Sound of Radio.

Playing a significant role in the sound of radio is the celebrated (?) NAB cartridge. Recording engineers, long-accustomed to the relative sophistication of open-reel, may wonder about the continuing popularity of the cartridge system in broadcasting. Elsewhere, the cart has all but disappeared, in favor of cassettes. Why not in broadcasting?

Why not indeed, asks Eumig USA, Inc. Technical representative Tom Bensen, who describes the company's micro-processor-based system, which may be used to control up to 16 cassette decks, using a low-cost personal computer. With a little creative imagination, such computer-controlled cassette systems will probably start showing up outside the broadcast studio as well.

Speaking of outside the broadcast studio (nice segue, huh?), what about wireless transmission inside the recording studio? The wireless microphone has been around for some years now, but until recently it has been regarded as somewhat of a compromise, to be used only when microphone cables are absolutely out-of-the-question. However, wireless transmission and reception has at last come of age, and John Nady offers us an

interesting overview of theory and application, both in and out of the recording studio.

While wireless microphones are finding their way into the recording studio, noise reduction systems are showing up outside the traditional studio venues. Dolby film sound comes to mind, and of course there's the Dolby 'B' system in consumer audio. Now, dbx is beginning to make its presence felt in broadcasting, and has in fact installed a custom-designed noise reduction system in National Public Radio's satellite communications system. This month, dbx chief engineer Leslie Tyler, shares with us the dbx approach to broadcast signal processing, which naturally includes a look at noise reduction, plus some talk about actually expanding dynamic range.

We close with an inquiry into What's New at the FCC. As you may have heard, there's a recession going on out there, and its having its effects on all of us. Traditionally, the recording/broadcast industries have been comparatively "recession-proof," as people stay home more and therefore spend more time listening to radio and records.

Well, this time around, our industry is also feeling the pinch, and it could certainly use a little perking up. In short, this would be a good time to see AM stereo and FM quad finally come off the drawing boards. The recording industry would be revitalized, AM radio would come a lot closer to "hi-fi," and FM would be able to surpass anything heard to date.

However, first we must contend with the Federal Communications Commission. The Commissioners rarely act in haste. Some say they rarely act, period. Our Special Report will bring you up-to-date on the Commission's most recent contributions to the state-of-the-art.

In a New York Times (July 20) article entitled "In the Public Interest. Hah!," Jerome Gillman (WUST-FM) describes his own seven-year battle with the Commission. He concludes with the suggestion that the Commission must be re-structured from scratch. The NRBA has sent reprints to all members of Congress, and it asks interested parties to write directly to their legislators to convey personal opinions and experiences in coping with the FCC.

Depending on the results of the November election, there may be some changes at the Commission, as well as elsewhere of course. (Some Washingtonians are already beginning to pack.) And so, this might be as good a time as any to let your elected representatives know how you feel. Maybe something good will come of it—but not unless you do your bit. ■

Computer-Interfaceable Eumig FL-1000

With all the problems confronted in using an NAB cartridge system, why not give cassettes a try?

IN BROADCAST AUDIO, the NAB cartridge system is by now a well-established fixture. Therefore, before going into the technical details of interfacing a cassette system with a micro-computer for broadcast applications, it might be wise to answer the question; Why use cassettes in the first place?

Quite simply; Why not? The broadcaster has been living with the NAB cartridge for more than 25 years, trying to cope with problems such as excessive wow and flutter, poor stereo separation, phase shift and imaging. The graphite-lubricated tape requires constant maintenance and its residue causes jamming, tape breakage, etc. Because of all of the above, the NAB cartridge also suffers from instability of frequency response.

Though advances have been made recently in the NAB cartridge system, it is still unable to compete with the specifications of today's cassettes. According to Ed Havens, technical services manager at TDK Electronics, "It is widely recognized that more emphasis has been placed upon the audio cassette in the last ten years than any other analog tape medium. Improvements in all areas of their development have elevated cassettes technically, certainly exceeding those of the NAB cartridge, while effectively challenging open-reel recorder specifications at 7½ ips. The most significant improvements in cassettes are generally noticed in two areas: tape formulations and shell construction.

New tape formulations such as Ferric Cobalt—an equivalent to CrO₂—and most recently, pure metal particle tapes, have measureably improved the high-frequency headroom, and extended overall response and signal-to-noise ratios to meet or exceed broadcast specifications.

Improvements in quality shell construction have helped reduce wow and flutter and maintain near-perfect alignment between the A and B sides of the cassette, while smoothing out tape travel within transport mechanisms in general. In short, cassettes have come a long way. They work better, they certainly sound better, and have proven to be a reliable medium."

With this in mind, it was Eumig's intention to design and build a microprocessor-controlled tape transport mechanism

which would fully exploit the cassette in terms of its technical superiority, while providing the broadcaster with an entirely new concept of automated program operation. As the design of Eumig's FL-1000 cassette progressed, three basic goals were established:

- a) provide a means to reach any position on tape, quickly and precisely.
- b) engineer a versatile and convenient remote control system.
- c) create a data bus system which would enable an external intelligent device (computer) to communicate simultaneously and bi-directionally with several sub-systems.

To summarize, the FL-1000 design allows it to be addressed via computer, be given a command, execute that command, and, move to the next event.

In fact, up to sixteen FL-1000s may be connected at once, suggesting obvious applications to the broadcaster. In an automated application, several decks (perhaps four to six), can be devoted to music playback. Two or three decks may effectively air and maintain the spot clusters, and time announcements can be accomplished by another deck. One would program all announcer breaks, another would be used for all P.S.A.s, while two decks would be used in the production area. One deck might be used strictly for automated network joining, for delayed newscasts, sport feeds, etc. In addition, one deck might be devoted to the local newsroom. All decks can be random accessed, playing any selection in any order.

At the control center is a relatively inexpensive computer, with at least 32K of memory. For sequence storage and programming, a floppy diskette drive may be used, and finally, a printer will notate automated logging of the broadcast material.

In the broadcast environment, such a system will provide full random access to any point on tape. Cue tones are not necessary, as the FL-1000 uses an optically-sensed counter which is universal among all FL-1000 decks. Due to the transport design, which will be discussed later, this counter system is accurate to the digit, regardless of the number of plays. It is therefore possible to play selection 2, advance to selection 7, rewind and play selection 3, etc. This is accomplished via a several-step process, which begins by using the FL-1000 as a digital recorder.

By means of three command codes (data onto tape, data from tape and data onto tape and monitor); digital tape may be recorded onto the tape via the bus lines and re-read.

Tom Bensen is technical representative for Eumig USA, Inc., Great Neck, NY.

All transmissions fed through the bus using a ten-pin plug/cable arrangement, which contains the following:

Line Designation	Pin	
Code Line	8	RFT Ready for transmission
Handshake Line	7	BY Busy line
Handshake Line	6	H ₁
Handshake Line	5	H ₂
Data Line	1	D ₀ negative logic
Data Line	2	D ₁ negative logic
Data Line	3	D ₂ negative logic
Data Line	4	D ₃ negative logic
Ground	9	*see note
Power Supply	10	+5 volts (TTL)

*To avoid transmission disturbances by inactive machines.

For the purpose of a broadcast demonstration made by Eumig at the last NAB convention, material was assembled in the following manner:

During recording of broadcast material, counter locations were noted and typed onto the computer CRT via the terminal keyboard, thus creating an Index or Table of Contents for that particular cassette. When fully assembled, the FL-1000 is told to write it (digitally) onto tape, by entering the command code, 1001.

The FL-1000 recognizes and confirms the command, switches into recording mode, mutes Audio in and out, and signals the receipt of data by illuminating the Source, Tape and Record LEDs. Data line D₂ becomes a serial data input (TTL signal). At this point, the CPU can transmit data onto the cassette via this (D₂) line. During data recording, BY, H₁ and H₂ remain in force, thereby blocking access by other participants on the bus. The data recording is terminated when the CPU frees the bus line. The FL-1000, in turn, frees the bus and stops.

The functions "data from tape" and "data onto tape & monitor" are treated identically; the data read from the tape are transmitted via D₀. The functions "data onto tape & monitoring" serves to recognize the end of the leader at the beginning or end of the cassette. The user can select the coding. A self-clocking code with approximately 2,400 Baud is recommended. The "data from tape" function may also be used to search intervals between pieces of music. During these intervals, the FL-1000 can also be used to load programs into the computer.

The information brought through the bus—in this case the Index—is recorded onto tape. When requested, the digital data is transferred back into the memory of the computer. All that need be done as a function of the program is to request a machine number and a selection number; for example, machine 1, cut 2. The FL-1000 will then advance towards or rewind to that location and execute the command. This is possible through the rather unique transport mechanism. Fabricated from die-cast magnesium alloy, it is a totally unconventional design which uses no belts, pulleys, flywheels or solenoids. It is a single-capstan, two-motor drive system, which uses a light-weight (under 7 grams) opto-electronic capstan and disk arrangement to both reference its speed (15,000 times per second) and maintain reduced wow and flutter—quoted at 0.035 percent WRMS or less. There is virtually no mass to overcome in attaining proper operating speed of 1 1/8 ips, which will occur from dead stop within 40 milliseconds.

As indicated, the FL-1000 can seek a counter position in response to a manual command from the user, or via the computer interface. The counter system, which operates from the take-up spindle, is also driven by a separate optical reference within the transport, when given a selection number by the computer from the index in memory. For that cassette, the FL-1000 "knows" to go to the appropriate counter position.

Astatic Delivers Sound Performance

Whatever your installation, Astatic delivers a full range of microphones to meet your demand for quality, performance and styling.

Since 1932, Astatic products have been meeting the

needs of installations ranging from the routine to severe environmental.

When the call goes out for quality, Astatic answers with a value-engineered product.



For complete information write for our Commercial Sound Brochure #CSD-80.

THE ASTATIC CORPORATION

Commercial Sound Division
CONNEAUT, OHIO 44030 (216) 593-1111 TLX 980742

In Canada: Canadian Astatic Ltd., 1830 Ellesmere Rd., Scarborough, Ontario M1H 2V5.



Circle 27 on Reader Service Card

www.americanradiohistory.com



In the foreground, a Commodore PET micro-computer handles programming chores, keeping track of ten or more cassette decks.

The most probable concern, and most often asked question is, what if the counter location changes due to tape stretching or aberration in tape packing density? There would be valid concern if addressed to a conventional dual-capstan or single-capstan design which utilize flywheels. However, the FL-1000 transport does not change packing density through normal play, fast-forward, or rewinding of the cassette, due to the reduced inertia placed on the cassette mechanism. Therefore, not only do the tape counter positions remain accurate, they are universal among all other FL-1000's. For example, if a selection begins at location 2248 in machine 3, and that tape is removed, placed in another FL-1000, rewound to the beginning, and told to go to 2248, it will still be in virtually the identical location (± 0.30 seconds). This tolerance is certainly more acceptable than the lead time needed to "punch-up" a cartridge or that which is necessary for an open-reel to attain proper speed and have the tension arms settle in place.

At this time, there are quite a number of stations in the final stages of incorporating the FL-1000 into on-air operation. At the vanguard is Associated Communications Corporation, an 11-station chain, based in both Pittsburgh, Pa and Tampa, Fl. According to director of engineering, Will D'Angelo, "Our goal was to incorporate the FL-1000 in a series of steps within our system. The first step was to incorporate it into the system as a direct replacement for the cartridge machine. Secondly, we were able to effectively interface it into a Cetec Schafer (System 7000 Automation System) as a music playback system. The third step was to use a computer for simple sequencing and operation. Finally, we are nearing completion of a full random-access system, using the FL-1000 for all phases of operation, including interfacing it into our station business system."

D'Angelo explains that they have been able to accomplish the business system interface by using a frequency-shift keying (FSK) track on the right channel and commercial material

recorded on the left channel in monaural for decks devoted to spots. Therefore, commercial logging is accomplished through reading the FSK track and in turn, is interfaced with the station business system to generate direct billing.

In addition to Associated Communications, there are other broadcast facilities throughout the U.S. in the process of incorporating the FL-1000. Some will be as elaborate as Associated's full random access system, while other planned applications are for simpler, live-assist environments.

Subsequently, there are other applications for the FL-1000 outside the realms of broadcasting, with new ideas being suggested daily. Some possible examples are:

- Organization and rapid access to large archives of sound effects and sound recordings, etc.
- Medical applications for the storage and quick retrieval of data and procedures in the operating theater during surgery.
- Automated time-indexed public address systems in industry, hospitals, and institutions.
- Text storage in libraries with quick access to selected passages, recordings, and other stored information.
- Multi-media presentations, multi-vision, etc., with simultaneous control of light and sound effects.
- Automated audio editing using several slave decks as sources and assembling excerpts from each to create a master (a similar concept to Umatic video editing in ENG operations).
- Educational and instructional audio-visual training.

There are undoubtedly a multitude of other applications which are yet to be suggested. It appears too, that the versatility of applications and functions of the FL-1000, when interfaced with a computer, are solely a factor of the limitations of the software involved.

Wireless Microphones— On Stage and in the Studio

On stage and in the studio, the performance of wireless microphone systems may now equal or sometimes surpass conventional methods.

WIRELESS TRANSMISSION OF SOUND was first achieved around the turn of the century. However, only within the last several years has the evolving state-of-the-art finally yielded radio-transmitted audio with both the fidelity and dynamic range required for applications subject to the most critical ear. This achievement had long been an evasive, yet natural, goal for radio transmission.

Interestingly (and fortunately), the impetus for the development of this high-level audio performance also dictated the need for simultaneous development of a highly-miniaturized radio transmission system. As it turns out, the screaming rock-and-roll lead guitar places more demanding dynamic range requirements on a transmission system than any other audio application. As a result, one of the most significant breakthroughs in radio-transmission audio performance was spawned in the course of developing a miniaturized wireless microphone-type system for playing electric guitars without cords.

Although wireless microphones have been commercially available for over 20 years, hard-bitten longtime users can testify that—until recently—performance was never even closely comparable to that of hardwired cords (especially for use in demanding applications such as cordless electric guitars).

The live entertainment and recording sectors of the general audio market can most immediately reap the significant benefits afforded by the imaginative application of this newly available technology. Of the two, the live entertainment field has a sizeable head start in advantageously utilizing wireless. This is because of its past willingness to compromise its audio performance, as evidenced by the relatively widespread use of earlier-generation wireless microphones. It is inevitable, however, that the recording industry will become more aware of the new possibilities now available in wireless systems which make no discernible sacrifice of audio quality. Already the vanguard innovators are beginning to pave the way in exploiting some of the advantages of going cordless in the

John Nady is founder and president of Nady Systems, Inc., an Oakland, California, based company which manufactures the Nasty Cordless FM tunable and the Nady VHF wireless systems.

studio. Since these advances and possibilities are still new to most interested parties, I will present in this article an overview of the entire present wireless phenomenon as it applies to both the entertainment and the recording industries. I hope this overall picture will create a better understanding of the exciting promise that wireless microphone systems offer for stage and studio.

USING WIRELESS SYSTEMS ON STAGE

The advantages of going cordless in live performances basically fall into two categories: practical/aesthetic, and technical. Under the former, there are: enhanced on-stage mobility, greatly increased theatrical possibilities, a streamlined, uncluttered stage appearance, and the performer's ability to hear the total sound offstage—during both sound checks and performance. Of course, the most practical benefit of cordless operation of electric instruments and microphones is the total elimination of potential electric shock hazards. Such common shocks, caused by improperly grounded amplifiers and/or other equipment malfunctions, have even proved fatal at times (Les Harvey of Stone the Crows and Keith Relf of the Yardbirds were both electrocuted in this manner.)

A well-designed wireless system also offers several technical advantages over a hardwired cord. Cables are not ideal transmission systems for audio signals. Due to their inherent capacitance, they act as lowpass filters and can severely attenuate the highs when used with high-impedance musical instrument pickups. Although cables vary somewhat in this characteristic, most will start to "muddy" the sound at lengths over 20 feet. In addition, cables act like antennae and pick up spurious noises from light dimmers, radio signals, power lines and other external sources. Used with certain combinations of effects pedals or amps, cords often pick up nearby radio stations

and CB'ers. All these things considered, it is no surprise that the list of the hundreds of now cordless top acts reads like a "who's who" that encompasses a broad spectrum of popular music, including such diverse styles as that of the Rolling Stones and Herbie Hancock. However, the natural education and emulation process has, especially in the last year or so, filtered through to the mass market, and a healthy rapid growth is presently evident in this sector of the wireless field. The use of these new wireless systems is not limited to microphones and electric guitars. Musicians of all kinds are discovering the joys of going cordless. Increasingly seen and heard on stages everywhere are cordless electric saxes, trumpets, flutes (with pickups or tiny microphones), electric violins, mandolins, acoustic guitars (with pickups) and even an occasional exotic application such as miniature drum synthesizers. It is clear that possibly within several years—within a decade for sure, as the understanding of this technology continues to spread—cordless operation of most on-stage musical instruments will become the norm.

USING WIRELESS SYSTEMS IN STUDIO RECORDING

Wireless systems are increasingly finding their way into the recording studio, and this is not surprising, considering the diverse ways in which cordless operation can aid today's recording engineer. In fact, in the last two years, there have probably been a dozen popular recordings released (gold or better) which have utilized some form of wireless operation during their production.

Before citing studio uses of wireless, I would like to briefly discuss our own experiences in this area. Most of these applications are ones I have used over the last five years or so in my 8-track basement studio. Since we had been developing a new generation of wireless systems during this period, I had prototype new-generation wireless systems available for several years before we introduced them on the market in 1977. In fact, we have done completely cordless 24- to 32-track recordings (via extensive ping-ponging) utilizing all the wireless techniques outlined below.

Of course, our recording work was necessarily limited in time and scope compared to larger commercial studios. Recently, we have started work on an in-house 24-track recording and videotaping studio, which will be equipped so that we can expand our experiments in recording entirely wireless. In addition, although we haven't done an extensive survey of the present state-of-the-art, we have received quite a bit of feedback about studio wireless use in the last two years from customers, interested studio people, and the like, which will aid in these experiments. My own personal feeling is that there are still advantageous applications of wireless that haven't been discovered—and we hope to find and utilize them.

Originally, we were committed to exploring the concept of the totally cordless studio because of our interest in wireless systems. Not every studio owner will see the need to immediately commit to cordless studio operation to the extent we have. However, from what we have already learned, wireless use in the studio, as on the stage, should not be thought of simply as a "gimmick" to attract customers (although it has obvious potential in this regard). Rather, studios interested in upgrading their overall operations (a necessity in this increasingly competitive field) should seriously study the ways of integrating this potentially valuable tool for what promises to be its maximum benefit—a powerful aid toward improving operational efficiency.

The immediately obvious studio application of a wireless system is to allow the electric musician the freedom of physical separation from his amplifier. In the studio, this introduces a whole new dimension of possibilities. For example, physical separation from a loud amp allows a musician to hear his headset mix at lower, more manageable, less fatiguing SPLs—a definite advantage on long sessions. The musician can even play from the control room, which can often give him a better "feel" than loud headsets in the studio. Also, the logistics of over-

PRESSURE ZONE MICROPHONES



A fundamental advance in the art and science of microphones.

- Cleaner sound without distortion.
- Rugged, unobtrusive mounting.
- Minimum phase, phase coherent.

Available through

ANDREWS AUDIO CONSULTANTS
451 West 54th Street
New York, N.Y. 10019
(212) 674-6934

DAVID ANDREWS



Rod Stewart in concert using a Nasty Cordless microphone.

dubbing on many takes can often be made easier with the engineer and musician sitting side-by-side in the control room.

In my own experience, I have even done dubs from out-of-doors in my back yard (on exceptionally nice days)—while beaming the signal to my amp and communicating with my engineer via two-way wireless systems. Exploring such possibilities can be a refreshing change from the everyday rut of studio procedure and the wireless system makes it very easy. This can be important these days, as more and more studios discover that artists are considering ambience and mood of the places where they choose to record.

There are several technical advantages of using a well-designed wireless system in the studio. As discussed earlier, there is the freedom from high frequency cable loss, and from spurious audio degradation. Another happy advantage of using a wireless system in a studio, especially for electric guitars, is an up to 20 dB improvement in immunity against 60 Hz hum pickup. In other words, a well-designed wireless system is actually quieter than a cord! Furthermore, wireless receivers have two outputs—with separate line and mic-level signals—thus eliminating the need for direct-box interfacing by allowing both amp and direct feeds simultaneously.

Of course, the ultimate advantage of cordless studio operation is probably "streamlining." The recording studio is even more a maze of jumbled cords than the concert stage, and a significant percentage of valuable studio time is lost in dealing with this labyrinth during all phases of a typical session. As in our previous 8-track studio, all inputs in our new 24-track studio will be on separate radio frequency channels. This greatly facilitates setup and breakdown. During a typical setup, we simply choose the mic, attach it to the appropriate transmitter and place it in the desired location. This procedure is an

especially welcome labor shortcut on complicated multi-channel takes. And, it's a pleasant change to walk around during a recording session without having to watch out for the tangle of cords underfoot!

It is also advantageous to eliminate still more cords in the studio by using a wireless headset monitoring system. We use our tunable FM transmitters in conjunction with high-quality FM headphones. These work well for most applications without any significant sacrifice of audio quality.

Sometimes, special recording needs arise where the use of wireless monitoring is practically mandated; for example, by percussionists when there is to be a lot of quick movement by several musicians between percussion instruments. The movement is usually made extremely difficult by the entangling of headset cords. For a specialized application, such as a movie sound track, separate input circuitry on the transmitter provides for proper click-track cueing.

There is another advantageous studio use of the professional, well-designed FM tunable transmitter. It can be used in conjunction with several miniature FM portable radios simultaneously as an aid to gauging the sound on typical low-priced consumer equipment. This function is presently fulfilled rather inaccurately by the use of small "car speaker" type monitors, generally driven by atypically overpowered, overly-clean amplifiers.

USING WIRELESS SYSTEMS IN LIVE RECORDING

Live recording can also benefit from the judicious use of wireless systems. In such situations, the extra cable runs needed can be a logistics nightmare. Not only are there more microphones on stage adding to the tangle, but long, difficult cable runs to the recording track are often needed. Sometimes, special staging needs entirely preclude the use of cords. We worked on one project that is a perfect example of this—the

Marketing Manager

Pro Audio Products

Outstanding growth opportunity in newly created top marketing job with the leader in Digital Audio Processing. Requires demonstrated competence in management of an independent sales rep/dealer sales organization, in advertising promotion and literature generation, and in market planning and product definition.

Will assume overall responsibility for planning, budgeting and executing a cost effective marketing and sales program. Personal qualifications should include good verbal and written communication skills, familiarity with professional audio markets, and ability to get things done with limited staff in a small growing company. Job is at home office in suburban Boston area. Compensation open and dependent upon qualifications and ability to contribute. Send resume and/or call Ron Noonan.

lexicon

60 Turner St., Waltham, MA 02154/(617) 891-6790



The Nady Pro 400 and Pro 500 and Nady Cordless.

acoustic side of Neil Young's recent sound-track album from his movie, "Rust Never Sleeps." The simultaneous use of four wireless channels (two on voice and two on acoustic guitar) allowed Mr. Young to wander about the stage unencumbered by cords. The enthusiasm of the engineers working on this project surely means many more such productions will be forthcoming. Such a quality recording would not have been possible just a few years ago with the previous generation of wireless microphones.

Another logistics aid of wireless during live recording is in use with remote microphones over the audience for applause pickup. Often, hardwiring a single such microphone over high beams, etc., can take hours. From our experience, a less expensive wireless mic with less dynamic range than the top available equipment works quite well for this application.

VIDEO OR FILM SOUND RECORDING

Video or film sound recording is the area of live recording where the new generation of wireless microphones will make their greatest impact. Although wireless mics have been used for years in this classic application, their generally poor sound, spurious RF noises, and unreliability made them a mixed blessing at best. The old-style wireless systems had limited signal-to-noise ratio, which necessitated the use of compressor/limiters. Movie sound men suffered with all these audio degradations for years. In recent years, more and more attention has been placed on high-quality, clean, noise-free sound tracks (witness, for example, the increasing use of Dolby noise reduction). It is especially fortunate that the best of the new breed of wireless microphones can guarantee studio-quality sound with noise-free, wide-dynamic-range transmission, even in the most difficult shooting locations—and with no annoying compression/limiting.

GUIDELINES FOR JUDGING WIRELESS PERFORMANCE

A question remains—Does the wireless microphone impose any compromises? Certainly, the specs of today's state-of-the-art wireless systems meet the objective criteria of present recording requirements. However—as with all electronic signal processing equipment—subtle colorations are introduced that some may swear by, and others, at. Ideally, each interested user will experiment and answer this important question for himself.

As discussed earlier, not all wireless systems perform similarly. In fact, there is now a wide diversity in performance on the wireless market. How then does the potential user choose a system in the confusing and mysterious arena of cordless radio transmitters? By what guidelines does one judge a wireless system?

In order to understand the criteria by which to make an intelligent choice, be aware of the potential problems exhibited by wireless systems. These include: radio signal dropout (null spots); interference; transmission range limitations; audio degradations, including limited signal-to-noise (dynamic range); and poor reliability. A well-designed wireless system is one that has maximized performance specs with respect to each of these potential pitfalls. Let's discuss these problems.

DROPOUTS (NULL SPOTS/DEAD ZONES)

While passing through the air from transmitter to receiver, radio waves generally encounter a maze of reflective and absorptive obstructions. When radio waves bounce off nearby surfaces and meet in space such that one wave's crest encounters a reflected wave's trough, a 180-degree cancellation occurs. A receiver antenna located at that point in space will register no received signal and a radio dropout will result. Although these null spots can occur at any receiver distance from the transmitter, they are fortunately very infrequent up to $\frac{1}{2}$ to $\frac{2}{3}$ of the system's ultimate range at any given location. Nevertheless, in most critical applications, a maximum null-spot-free range is required. There are two methods of solving this problem currently offered by wireless manufacturers—antenna diversity and receiver diversity. These two methods are in no way comparable in effectiveness.

Antenna diversity is actually a misnomer—it is no more than antenna combination. In theory and practice, antenna diversity has proven to be ineffective in significantly eradicating null spots and improving range.

The only reason for the existence of antenna diversity units on the market is that they are a lot simpler and cheaper to produce than receiver diversity systems.

In receiver diversity, two separate receivers and two separate antennae are employed to process the single transmitted radio signal. In a well-designed true-diversity system, a totally silent comparator circuit continuously monitors the received RF signal strength of both receivers and instantaneously selects the audio output of the receiver with the stronger signal. In this way, there can be no vector cancellation of the received signals as in antenna diversity, since the two antennae are completely separate.

The US Navy researched the problems of null-spot dropout in its critical radio applications for years and concluded that post-detection diversity receiver switching was the only possible way to mathematically eliminate dead zones. Although receiver diversity systems are more costly than a single receiver with several antennae, the dramatic improvement in reception reliability is well worth it.

INTERFERENCE

Unfortunately, there are not yet any radio frequencies set aside by the Federal Communications Commission in the United States (or by similar radio governing boards elsewhere) solely for wireless systems. Consequently, a potential user should be aware of the frequency allocations in the locales in which he plans to use his system(s) to avert any potential interference problems.

There are two frequency bands most successfully utilized by today's professional wireless systems: the commercial FM band (88-108 MHz), and the VHF business and TV channels band (150-216 MHz). The wireless systems operating in the commercial FM band are tunable so that they can be tuned to blank spots between FM stations. The VHF systems are all fixed-frequency, and cannot be tuned to open frequencies. For applications such as traveling musicians, live recordings, etc., where clear channel accessibility and freedom from random interference is a must in all locales, a well-designed, frequency-stable tunable system, is recommended. Even for fixed location use, such systems offer a maximum of immunity from any possibility of interference from CB'ers, cabs and the like since such business bands are so far removed from the commercial FM band.



The Rolling Stones in concert. Note the 'Vasty Cordless' on Richards' back.

Designing a usable VHF system is complicated by the fact that, since it is not tunable to an open channel, it has to be as immune as possible from weaker signals on the same frequency and from strong adjacent business or TV channel interference (i.e., a good capture ratio of 1 dB or less and at least 100 dB image and spurious rejection). Therefore, to compete with a tunable system's usability in all locales, the VHF system must be extremely well designed. With careful selection of frequencies, VHF systems do offer the advantage of enabling the maximum number of channels to be operated in one location. For this reason, in the 24-track studio we are currently building, we plan on using more VHF systems than FM tunables. When finished, this studio will probably have more radio mics operating in one location than any previous setup ever attempted! The importance of proper design to prevent any radio crosstalk between adjacent operating units is especially critical in any such multi-channel application.

TRANSMISSION RANGE

A well-designed wireless system generally has a usable range of about 150 feet minimum under adverse conditions, and up to 1,500 feet line-of-sight. Receiver diversity (two receivers with separate antennae) provides greater usable range than single receiver or antenna diversity operation, all other conditions being equal. Different applications, of course, require different operational ranges. For on-stage use, a wireless system must provide a totally solid radio link between performer and amp for at least 100 feet. Due to sound travel, there is an acoustic delay of about 100 milliseconds at that distance. It is difficult, if not impossible, for musicians to keep in time at longer distances and longer acoustic delays. For studio use, these delays are generally not a problem.

For all the applications we've discussed, wireless systems which provide at least 150 feet under the most adverse conditions will serve quite well. Not all units presently available

UNEQUALIZED RESPONSE

The state-of-the-art in compressor drivers has reached a new high.

Pure Beryllium Diaphragms and surrounds that are extremely lightweight and rigid result in unsurpassed high frequency response and sensitivity. They are bonded to edgewound voice coils capable of withstanding temperatures of up to 400° C (752° F).


Computer-Aided Design and Laser Holographic Analysis have provided the flattest response and phase uniformity, giving the TD-4001 unprecedented intelligibility.

Precision Machining and Assembly of the highest quality materials result in dependable, predictable performance.

The TD-4001 driver meets the requirements of the uncompromising professional. For additional information, contact:

TAD Technical
Audio Devices

A division of U.S. Pioneer Electronics Corp.
142 Redneck Ave., Moonachie, N.J. 07074
(201) 310-8234 - Telex: 133484 PIONERUSA MCN

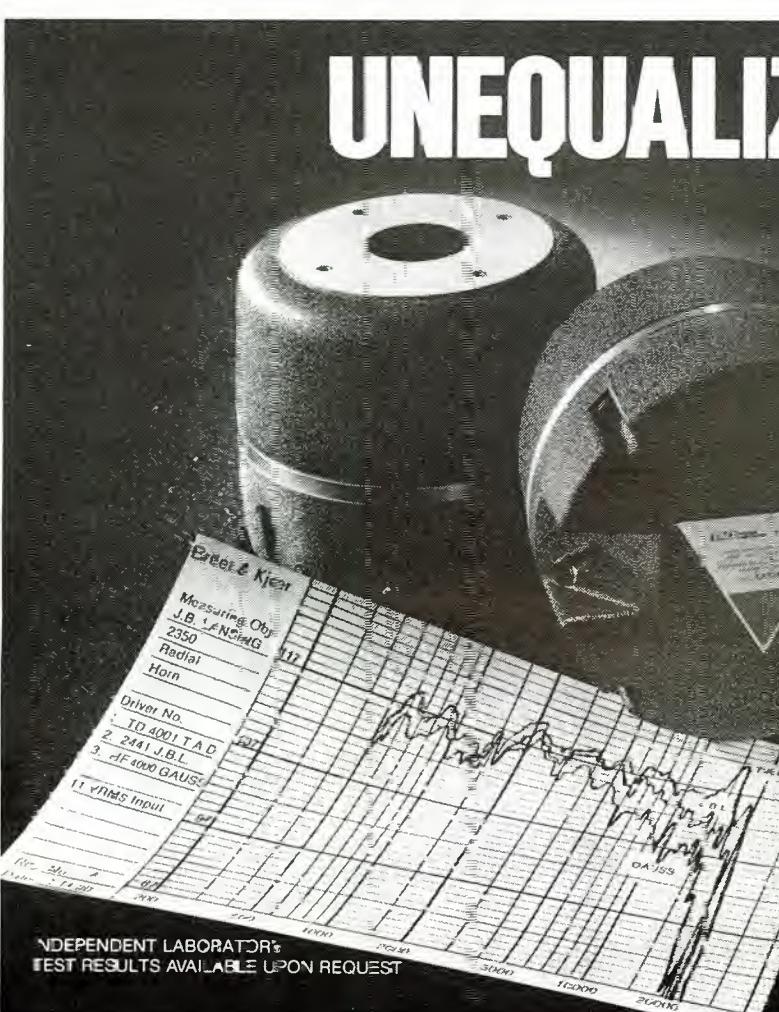


Circle 37 on Reader Service Card

Perfect Timing

If You've Wanted To Put Time Code On Your Tape, But Can't Afford The High Cost Of SMPTE:

The ES 280 TIME CODE GENERATOR/READER Is For You!

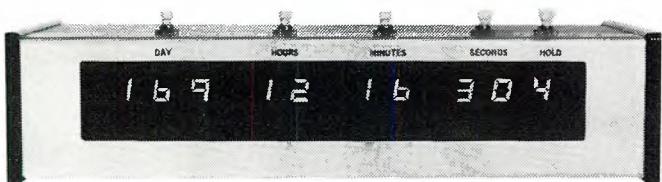

The new, low-cost way to provide time information on all your tapes, **ES 280** generates a time code which includes DAYS, HOURS, MINUTES, SECONDS AND TENTHS OF SECONDS.

With the flip of a switch, **ES 280** becomes a reader, to locate that certain place on the tape.

An Amplitude Control knob is located on the rear, so that you can use the 280 with *any* recorder, Video or Audio.

The 280 uses tones that are compatible with the cue tones used in cartridge recording.

ES 280 COSTS \$500.00

ES 281 (READER ONLY) \$375.00

Contact us or one of our dealers, and we'll tell you how you can get your own 280.



(213) 322-2136
142 SIERRA STREET • EL SEGUNDO, CA 90245

can reliably deliver this level of range performance. Published specs can often be misleading in this respect and it is highly recommended that one test a system for the range necessary in any expected application.

AUDIO LIMITATIONS

The greatest variation in performance features between wireless systems available today is found in transmitted audio quality. As a result, the wireless consumer can choose between available products (often priced the same) whose audio performance varies as much as night and day.

A word of caution: since most wireless systems are a relatively expensive investment, one should do careful market research before choosing. Listen carefully to the several top choices available. Even among those companies now offering new, improved systems, there is still significant performance variation evident. Some manufacturers are obviously further along than others in developing and implementing the new technologies.

Distortion, frequency response, and dynamic range are the three key parameters in measuring the audio quality of any electronic processing equipment. Let's consider each of these criteria with respect to the operation of today's wireless systems.

DISTORTION

Measuring distortion in any piece of electronic gear can be a numbers game and wireless systems are no exception. Published specs often quote a figure that represents a best-case situation that may not reflect realistic in-field usage. Under typical conditions, most wireless systems will yield an approximate THD of 0.7-to-3 percent, depending on the transmitted audio level and the audio frequency. The best new-generation systems improve that performance to about 0.2-to-0.6 percent THD. Discerning the desirability of the subtle colorations introduced into the transmitted audio at these lower distortion levels becomes a subjective decision and depends on the application intended.

FREQUENCY RESPONSE

Frequency response in today's professional wireless systems range from 100-7,000 Hz (± 3 dB) to 20-20,000 Hz (± 3 dB). Again, the intended usage can dictate the frequency response needed. Published specs tend generally to be overly optimistic, so for critical applications, a careful listen or on-bench testing is recommended.

DYNAMIC RANGE

The greatest single breakthrough in the performance of wireless systems is the recent dramatic improvement in dynamic range offered by the best of the new-generation units. Signal-to-noise has improved from a previous high of about 65 dB, to over 100 dB. By comparison, a commercial FM station only registers about 70 dB signal-to-noise through a high-quality receiver, and NASA's ultra-sophisticated deep-space network only about 90 dB signal-to-noise.

It was discovered early in the development of wireless systems for playing cordless electric guitar that about 100 dB signal-to-noise was needed for immunity from annoying background hiss when played at full volume. Earlier systems (all of which are still on the market) relied on compressor limiters on the transmitter input to handle the wider dynamic range excursions regularly encountered in typical usage. This results in the unnatural "squeezed" sound on the louder signals so typical of limiter operation and makes such systems barely adequate for most applications. The best new extended-dynamic-range systems have no need for compressor limiters, and are thus comparable to hard-wiring in accurately handling any of the loudest audio inputs.

Given the highly competitive atmosphere in today's wireless arena, much secrecy still necessarily surrounds the exact details of the technology which effected this vastly increased signal-to-noise. It is well-known, however, that the key process used is companding. Of course, companding has helped to quiet audio

processing systems in the past, but its successful application to wireless systems awaited the overcoming of many formidable obstacles, including unacceptable audio degradation and the restraints of miniaturization.

Schematically, the process is similar to the familiar use of noise-reduction companders in recording, where encoding and decoding enables audio reproduction through a noisy medium (recording tape) without retention of that medium's inherent noise. In this case, encoding (compression) at the transmitter input is matched by complimentary decoding (expansion) at the receiver output. The noise of the radio transmission process, which previously limited the final output signal-to-noise, is entirely circumvented. Since lower level radio "buzzes" and "whoosers" typical of weakly-received RF signals are also eliminated in this manner, both effective usable range and increased immunity from null spots is also significantly improved.

Of course, anyone familiar with the different companding schemes in the recording process will be aware that audio problems can be introduced by the use of improperly designed companders. And so it is with the present state-of-the-art in wireless systems. Significant performance variation is evident among products offered by the several competing manufacturers that have so far introduced wireless systems featuring extended dynamic range using companding. For example, the signal-to-noise ratio in these differing units varies from about 80 dB to slightly over 100 dB. Also, each design exhibits varying success in dealing with the audio degradations most common to the compander: "breathing" (annoying auditory changes in the background hiss level), "pumping" (inaccurate input-output signal tracking), and transient response, especially to low-level signals. Since some companies have been working at the development of this technology a lot longer than others, this situation is not surprising.

Again, especially for the most critical intended applications, a comparative listen to the different systems available under worst-case conditions will prove invaluable in making an intelligent choice.

RELIABILITY

Like any piece of very complicated electronic gear, wireless systems are subject to breakdown from parts failures, rough handling, or just poor production and design. Each manufacturer has his own approach to solving this potential problem. The ultimate test of reliability is proven ruggedness and roadworthiness. Because the market is still so relatively undeveloped for many of the applications discussed above, the potential customer presently has only one way to gauge this very important factor in deciding which system to buy. Only people who have been using the various wireless systems for a reasonable length of time can testify to a brand's typical reliability. The primary users of the new generation of wireless systems so far have been the top touring pros. The potential consumer would do well to find out what wireless systems these artists are consistently using—he can generally be sure that their professional sound crews have researched the market carefully.

* * *

As a longtime advocate of the use of wireless systems, it is especially gratifying for me to witness the ever-broadening interest in this technology. With the dramatic improvements in performance now available, I feel the widespread acceptance of wireless systems is just around the corner. The timing is now just a matter of education. A continuing healthy growth in the general awareness of the diverse possibilities of the new wireless technology will hasten the day when wireless systems will take their rightful place as a valuable tool in all phases of the entertainment and audio industries. ■

UNEQUALED PERFORMANCE



Powerful Alnico Ring Magnets; select high purity materials and precise machining tolerances produce the strong linear fields necessary for demanding applications

Computer-Aided Design and Laser Holographic Analysis enabled the production of true linear piston motion assuring low distortion and controlled response. The resulting sound is smooth and uncolored at levels in excess of 120dB at one meter.

High Power Voice Coils edge-wound on four inch heat resistant glass fiber bobbins assure long-term dependability.

Model TL-1601 is recommended where high level, low frequency sound is required.

Model TL-1602 offers a carbon fiber bonded cone and a wide 21 to 2000Hz bandwidth.

The TAD 15 INCH loudspeaker meets the requirements of the uncompromising professional. For additional information, contact:

TAD Technical Audio Devices

A division of U.S. Pioneer Electronics Corp.
142 Redneck Ave., Moonachie, N.J. 07074
(201) 440-8234 - Telex: 133484 PIONERUSA MOCH

Broadcast Signal Processing: The dbx Approach

Presenting a brief overview of methods to keep it louder, quieter, cleaner, compressed-expanded. Why, there's nothing to it!

BROADCASTERS TODAY face a persistent problem; to maintain a consistently high level of audio quality when switching from live announce mikes, to records, to remote coverage. The "sound" of the live mike in the studio is excellent, but the phonograph records are marred by scratches and surface noise; the cartridge's high end is strangled in dropouts and high frequency saturation. Remote feeds are replete with hum, hash, and other garbage picked up over land lines.

One simple solution is to reduce the quality of all the programming to the lowest common denominator; simply run the studio audio channel across town on a telephone line, then add tape delay using a modified cartridge machine! But this procedure is hardly in keeping with the goal of producing high quality audio for the station's audience. Besides, products which can better solve the broadcaster's dilemma of how to provide a consistently high level of programming when switching among various sources are now available. Of course, some of the most successful applications incorporate noise reduction.

NOISE REDUCTION THEORY REVIEWED

The compander (compressor/expander) has been around for some years. Many attempts have been made to apply this concept to professional audio and broadcasting, but most of these have been less than successful for technical reasons.

The dbx approach uses a voltage-controlled amplifier as the control element and a true RMS circuit to sense the signal. These optimize the compander performance for ease of operation, maximum noise reduction, and increased headroom for the storage or transmission medium.

The noise reduction system consists of an encoder (with a constant 2:1 compression ratio) and a complementary decoder to precisely recreate the dynamic range of the original program material. The noisy medium (tape recorder, telephone line, microwave link, etc.) is sandwiched between the compressor and expander, with the dynamic range of the input signal cut in half during passage through the noisy channel.

Noise reduction is due, in part, to the masking effect of the program signal on the channel's noise level. For example, high-level musical signals may be loud enough to mask the perception of most noisy channels even without noise

reduction. During quieter passages, however, the floor noise becomes audible. By placing the compressor before the noisy channel, the signal going through the channel is kept at high levels, so that more effective masking can take place. On playback, the expander restores the signal level to its proper value, while pushing down the noise at the same time. During periods of silence in the input, channel noise is pushed down so far as to become inaudible.

For a given signal-to-noise ratio, levels within the channels can be held down. The lower signal levels almost invariably result in less distortion of the signal. Because of the noise reduction system's action, the normal degradation of the signal-to-noise ratio with less signal will not take place. In addition, an increase in headroom is also realized.

THE dbx APPROACH TO COMPANDERS

For noise reduction to work in reality, a more sophisticated approach than has been suggested above is necessary. For a compander to operate properly, the compressor and expander must operate as mirror-images. To control the expansion/compression operation, each must have a signal detector.

There are three common types of signal detection: peak, average, and RMS. Since peak and average detectors are sensitive to phase shift, these types of signal detectors are inadequate for broadcast applications. To cope with time-dispersive media—channels with non-flat group delay, where relative phase shifts of different frequencies can cause severe alterations of wave shapes—dbx uses RMS level detectors in both compressor and expander. RMS detection measures the sum of the energies present in the signal and is not sensitive to phase shift introduced by time-dispersive media. RMS level is unaffected by irregular group delay. Peak and average level, however, are significantly altered. The use of RMS detectors insures much closer tracking between compressor and expander levels than would be possible with other detection schemes.

Since the dynamic range of live music sometimes approaches 120 dB, a means of automatically varying level in response to the detector's output over a 60 dB range must be used to achieve the 2:1 compression ratio. In addition, the dynamic range of the gain control element itself must be 120 dB or more, in order to avoid degradation of the input signal. To fulfill these criteria, dbx employs a voltage-controlled amplifier (VCA), which uses log-anti-log techniques. At the same time, the VCA control constant of -6 mV/dB , with 0 V control corresponding to 0 dB (unity) gain, is a fortunate match for the RMS detector's output constant of -6 mV/dB , with 0 V output corresponding to a presettable reference level.

Leslie B. Tyler is Chief Engineer of dbx, Inc., Newton, Mass.

To better cope with high frequency noise content within the channel, and to combat tape modulation noise, a high-frequency pre-emphasis of approximately 12 dB is used in the encoder, with a complimentary de-emphasis in the decoder. The de-emphasis serves to reduce high frequency noise by 12 dB when the signal is decoded.

Unfortunately, the 12 dB pre-emphasis alone would impose a headroom requirement on the transmission channel which may not be met in reality. Tape recorders which run at slower speeds are especially prone to high level, high frequency, saturation effects. To deal with this problem, dbx includes level detector pre-emphasis. This causes the RMS detector to weigh high frequencies more heavily than low frequencies in order to complement the signal pre-emphasis used and the anticipated overload situation.

TYPE I AND TYPE II NOISE REDUCTION

Since overload characteristics of tape machines vary drastically with their operating speeds, different amounts of level detecting pre-emphasis may be required. For example, the dbx Type I system is optimized for operation with high-speed tape machines (15 ips or greater), or transmission channels with wide bandwidths and generous high frequency headroom. Detector pre-emphasis begins at approximately 1.8 kHz, and boosts high frequencies by as much as 19 dB. The Type I detector bandpass is 20 Hz to 27 kHz.

The Type II system is appropriate when the bandwidth of the medium is narrow (particularly at the high frequency end), when peaky high frequency response is present, or when headroom is limited at high frequencies. Type II is therefore especially useful for 3 1/4 ips and 7 1/2 ips tape machines, as well as telephone lines and other restricted media. Detector pre-emphasis in the Type II system begins at approximately 440 Hz, and reaches a maximum boost of 20 dB. The bandpass is 30 Hz

to 10 kHz. When used properly, both systems can deliver in excess of 100 dB dynamic ranges.

BROADCAST NOISE REDUCTION

For the broadcaster, the primary limitations to signal-to-noise ratio lie in STLs (studio-to-transmitter links), telephone line feeds, cartridge tape machines, and video tape recorders. Although modern broadcast consoles have excellent signal-to-noise ratios, the best console in the world cannot show off its wide dynamic range when processed through a noisy STL.

Telephone lines are notoriously noisy, and when adequate bandwidth is available for proper encoder/decoder tracking, can greatly benefit from a noise reduction system. Furthermore, cartridge machines frequently suffer from headroom limitations and poor signal-to-noise ratios. Audio sections of video tape recorders are often relegated to second place in their overall design. For these situations (noise reduction around channels with limited high frequency headroom and response), dbx recommends Type II noise reduction.

When noise reduction is added to all station sound sources, the differences in dynamic range between these sources may be so small as to be inconsequential. A note of caution: when using any noise reduction, equipment such as equalizers, compressors, etc., must be kept out of the encode/decode loop. While the linear 2:1 compression/expansion ratios insure that level variations will not cause decode errors, any alteration of frequency response or dynamic range will introduce tracking errors.

SATELLITE COMMUNICATION SYSTEM APPLICATIONS

A compander system can be used to compress the audio signal sent around the world via satellite link. Unlike the dbx companding systems described earlier, the system designed for

4600 SMPTE Tape Controller

Before you do another multi-track session, call us for a personal introduction to electronic audio editing.



The BTX Corporation | 438 Boston Post Road, Weston, Massachusetts 02193 • (617) 891-1239
6255 Sunset Boulevard, Hollywood, California 90028 • (213) 462-1506



Circle 38 on Reader Service Card

satellite communication system applications is a 3:1 compressor/expander system. It contains highly specialized pre-emphasis and de-emphasis networks and very tight frequency response and tracking specifications. The dbx 321 compander system was built on an OEM basis for National Public Radio System's ground station installation. It allows NPR to transmit high quality audio signals over otherwise very marginal satellite channels.

CUSTOM-TAILORING COMPRESSION RATIOS FOR DIFFERENT BROADCAST APPLICATIONS

Many areas in broadcasting require varying compression ratios suited to particular applications. As an obvious example, the classical music station might desire a gentle compression ratio for much of its programming as well as a higher ratio to improve intelligibility during news broadcasts.

Unlike compressors in the noise reduction systems, this compressor is a feed-forward device, so that very high compression ratios (limiting) can be achieved with absolute stability. The maximum compression ratio available is $\infty:1$, wherein no increase in output takes place once the input is above the compression threshold.

The level detector used is an RMS detector. It has been chosen here because of its unique time constants and the closeness of its response to that of the human ear. The time constants of RMS detectors are such that more weight is given to a large increase in level than to a small increase in level. This results in an attack time which varies with the amount of change in signal level, getting shorter for larger level changes. The attack time may vary from 15ms for a 10 dB change to a 3ms for 30 dB change. The release rate (*not* time) is fixed at 120 dB/sec (dbx model 160 specifications).

The compressor/limiter provides a gentle, natural sounding compression effect, keeping levels stable on an RMS basis,

similar to the way in which the ear perceives levels. Since it will not over-react to peaks, the compressor/limiter should *not* be used as a device to prevent instantaneous over-modulation of a transmitter. However, it *can* act to control levels in a natural-sounding fashion, before the signal is sent to a final, peak-activated, limiter.

EXPANDING DYNAMIC RANGE

Although some form of compression is a broadcast fact of life, some broadcasters, seeking to enhance radio station sound, are experimenting with dynamic range *expanders*. Stations are using this equipment to reduce surface noise from records, emphasize detail in the nuances of the music, and generally capture a greater sense of the live performance. They are also finding that use of such signal processors can contribute to station "identity," which helps listeners recognize the station by its special sound character.


Splitting the audio frequency range into several bands brings freedom from undesirable side effects of expansion, since time constants are tailored to fit the bandpass of each section, and expansion of low frequencies will not cause pumping of high frequencies, and visa versa.

CONCLUSION

In today's highly competitive marketplace, increasing numbers of broadcasters are seeking high quality signal processors to custom tailor their station's sound to provide a marketing edge, to provide maximum talk power, or to clean up a noisy land line.

As with many companies, dbx engineers are cognizant of broadcasters' needs, and are interested in establishing an ongoing dialogue on signal processing equipment and signal processing problems.

Choose from two new recording electronics packages from Inovonics.

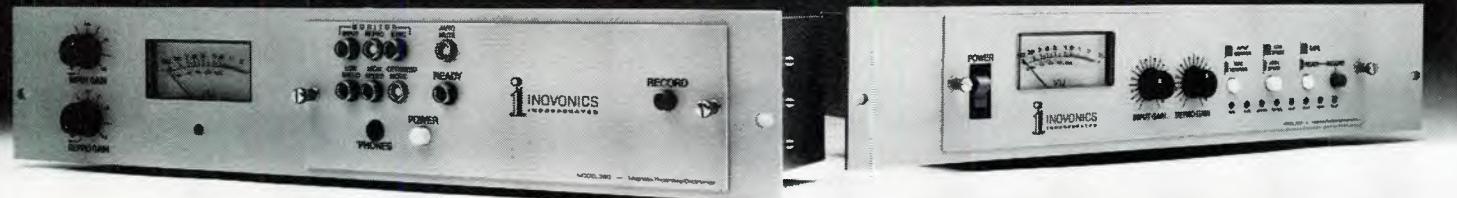

Model 380 is the upgraded successor to our well-known 375, used in hundreds of studios and stations around the world. With your tape transport and our 380, you have the ultimate analog recorder. Features of the 380 include:

- Advanced circuitry to reduce the effects of tape compression and phase distortions.
- Unprecedented signal and bias headroom for

- full compatibility with highest-coercivity tapes.
- Two "workhorse" EQ and bias settings, plus an optimized mode with separate setup for best performance from "super" tapes.
- Compatibility with virtually any combination of transports and heads.
- SYNC reproduce and exclusive auto-mute.
- Remote control of all functions.

The perfect pair.

Use the 380 to create new, ultimate-performance recording equipment, or to give your old tape or mag-film recorder a sound so clean you must hear it to believe it. \$820.00

Model 370 is intended for routine replacement use. It is compatible with most studio transports and a wide variety of original and replacement heads. The 370 will make "new" machines out of your older studio recorders, delivering superior performance and great reliability. \$580.00

For more information, see your distributor or contact us today.

Inovonics Inc.

503-B Vandell Way
Campbell, CA 95008

Telephone
(408) 374-8300

See us at AES
Booth Number 209.



Circle 23 on Reader Service Card

www.americanradiohistory.com

JOHN M. WORAM

What's New at the FCC?

EARLY THIS YEAR, optimistic Washington watchers thought they may have detected signs of life on 'M' Street, Northwest. At the headquarters of the Federal Communications Commission, it appeared as though the broadcast and recording industries were about to get an invigorating boost: In April, the Commission was expected to choose from among five competing AM stereo systems. At about the same time, the Commission was also going to resolve the matter of FM quadraphonic broadcasting.

Finally, it appeared that 1980 would be the year in which the FCC broke a long-hallowed tradition, and actually began to *help* the industry it serves.

Guess again! Perhaps in recognition of its position as the most inefficient federal agency within the US Government (according to the General Accounting Office), the Commission has once again managed to stifle technological advancement.

Commission-watchers speculate that AM stereo is now stalled until next year at least. FM quad is in no better shape, despite the fact that the matter has been before the Commission since *August, 1971!*

AM STEREO

Five AM stereo systems have been competing for FCC approval: Motorola, Magnavox, Harris, Belar, and Kahn. In April of this year, the Commission approved the Magnavox

system, setting off industry-wide protests. (At least some of the howls were predictable: with five systems in the running, *any* decision at all is guaranteed to displease 80 percent of the contestants.)

In the ensuing debate, it was learned that the FCC had prepared an "evaluation matrix," in which each system was graded on mono compatibility, interference characteristics, coverage, transmitter stereo performance and receiver stereo performance.

At first, the Commission denied a request (by Harris) to make the matrix public. Meanwhile, FCC staffers, preparing to justify the pro-Magnavox decision, acknowledged "ambiguities and omissions" in the record.

In its August 4 issue, *Broadcasting Magazine* published a "revised AM stereo evaluation matrix," presumably derived from FCC data. This shows Motorola as the high scorer, with 67 points (out of a possible 100). Belar is second, with 53, and Magnavox and Kahn, with 51 each, are tied for third. In fact, only Harris comes in lower than Magnavox, scoring 50 points. The Commission has not yet issued a satisfactory explanation for designating one of the third-place systems as the winner. However, it should be noted that the matrix does not give scores for coverage or receiver stereo performance to any system, due to insufficient data. Obviously, filling in the missing data could have a significant effect on the ratings. Did the FCC base its

decision on the missing information? We don't know, but at the FCC, chief scientist Stephen Lukasik apologized for the "ambiguities, discrepancies and inconsistencies."

From the thoroughly muddled proceedings to date, one thing appears clear: the FCC is not in command of the situation. It seems to be incapable of making an intelligent evaluation, even if this might be (as Commissioner Quello inquires) that all five systems are minimally acceptable.

If we may indulge in a bit of over-simplification, it would seem that the Commission might make one of the following statements:

- A. One system is clearly superior.
- B. One system is *not* clearly superior.
- C. We can't tell if A or B is correct.

On July 31, the Commission approved a Further Notice of Inquiry on AM stereo, which seems to indicate that C is the answer. That being the case, why did they approve Magnavox in April?

In engineering matters, one need not be embarrassed by requiring more data in order to reach a conclusion. However, when conclusions are published before the facts, we must come to some depressing conclusions of our own concerning the competency of our federally-appointed decision makers.

We suggest that the industry deserves better treatment from its regulators. When setting standards that will have a long-term effect on radio and recording, we don't expect the FCC to play "let's run it up on the flagpole, and see if anyone salutes." By a stroke of good (or maybe bad) luck, when the Commission ran Magnavox up on the pole, no one saluted, and the flag was taken down quickly, with apologies. That's really unfair to the

winner, to the losers, to all of us. In fact, the "winner" becomes a loser too, and the FCC's already tarnished image gets another scratch on it.

FM QUAD

At first, it may seem unfair to blame the Commission for the apparent "death" of quadraphonic sound. Indeed, some Commission insiders cite the poor showing of quad in the marketplace as justification for taking no further action.

However, it is a fact of life that the record marketplace is profoundly influenced by broadcasting practice. It is also a fact that, over the past ten years, the Commission has allowed some quad systems on the air, while others were kept off. Therefore, the listening public has not been able to hear all the contenders in the quad marketplace. Based on what has been heard, the public has not come to the support of any quad broadcast system. And manufacturers, anticipating eventual action by the Commission, have become reluctant to invest in any of the competing systems, for fear that it may be rendered obsolete, once the Commission does make up its mind.

And so the matter stands. But at last, the Commission has finally acknowledged that even the discrete (4-4-4) systems are capable of operation within the present broadcasting system. So it would seem that a standard might be written that would allow such broadcasts to take place. (It should be noted that the Commission has acknowledged that matrix standards are unnecessary, since such programming is already possible under existing stereophonic standards.)

Well then, we can expect the Commission to finally do something! Right?

Wrong! The Commission wants yet another period of comments. After all these years, they now want to know if they should; A, specify a compatible discrete system, or B, leave the matter entirely up to the marketplace. The FCC calls the latter a "general standards" approach.

Well, "column B" certainly sounds like the good-old American way of doing business, doesn't it? It's a wonder it didn't occur to them ten years ago, when there was still a marketplace out there.

But "specific" or "general," what's the *real* difference between A and B? If a specific discrete system is standardized, the broadcaster may either use it, or not use it—the choice is up to each station, and its own unique marketplace. If a general standards approach is in effect, the broadcaster has exactly the same options. The significant difference is that this "no-standard standard" offers no frame of reference to either the broadcaster or the manufacturer. It needlessly muddies the waters, since the Commission has already determined that a discrete system based on the QSI/RCA proposals is preferable, and—unlike the AM stereo situation—there has been no significant opposition raised.

Of course, the Commission is no doubt sensitive to the trouble it brought on itself with AM stereo; a "non-decision" on FM quad will spare the Commissioners more discomfort. However, the industry has suffered through ten years of pain, countless millions of dollars in research, and man-years beyond counting have been wasted before the Commission. After all that, surely we deserve the courtesy of an intelligent response from the Commission. Just one, that is—it needn't become a habit.

It's been said before that the Federal Communications Commission is a little out of touch with the broadcast industry. In fact, the National Association of Broadcasters (NAB) has requested that a committee be set up between government and industry, to help facilitate a comprehensive approach to AM and FM matters now before the Commission. The FCC has considered the request, but has decided to postpone action for the time being. Enough said?

HOW DO YOU MEASURE TAPE TENSION?

If something *SOUNDS FISHY* it may be your fish scale approach to measuring tension.



The Tentel Tape Tension Gage is designed to diagnose problems in your magnetic tape equipment. Virtually all recorder manufacturers use and recommend the TENTELMETER® for use with their equipment.

The TENTELMETER® measures tape tension while your transport is in operation, so you can "see" how your transport is handling your tape; high tension causing premature head and tape wear, low tension causing loss of high frequencies, or oscillations causing wow and flutter. Send for the Tentel "Tape Tips Guide". The T2-H20-ML sells for \$245 - complete.

50 CURTNER AVENUE
CAMPBELL, CALIF. 95008
(408) 377-6588

TENTEL

Circle 16 on Reader Service Card

db Classified

Closing date is the fifteenth of the second month preceding the date of issue.

Send copies to: Classified Ad Dept.

db THE SOUND ENGINEERING MAGAZINE

1120 Old Country Road, Plainview, New York 11803

Minimum order accepted \$10.00.

Rates: 50¢ a word.

Boxed Ads: \$25.00 per column inch.

db Box Number: \$1.00 per issue.

Frequency Discounts: 3 times, 10%; 6 times, 20%; 12 times, 33%.

ALL CLASSIFIED ADS MUST BE PREPAID.


FOR SALE

BX20 AND BX10 AKG reverberation systems. FOR IMMEDIATE DELIVERY. **UAR Professional Systems, 8535 Fairhaven, San Antonio, TX 78229. 512-690-8888.**

THE LIBRARY... Sound effects recorded in STEREO using Dolby throughout. Over 350 effects on ten discs. \$100.00. Write **The Library, P.O. Box 18145, Denver, Colo. 80218.**

JFET TUBE REPLACEMENTS for first playback stages in most Ampex Professional audio tape recorders/reproducers available from **VIF International, Box 1555, Mountain View, CA 94042. (408) 739-9740.**

IVIE ELECTRONICS REAL-TIME ANALYZERS, etc. Very slightly used demonstrators at discount. Full factory warranty. Money-back guarantee. **JML Company, 39,000 Highway 128, Cloverdale, CA 94525.**



- CONCERT SOUND
- PRO AUDIO SALES
- RECORDING STUDIO

CALF AUDIO
157 Gray Road Ithaca NY 14850 (607)272-8964

BEST PRICE—IMMEDIATE DELIVERY & FREE consultation on TEAC Tascam, Ampex, Sennheiser, Eventide, Studio Master, UREI, BGW, EV, Lexicon, ADR, Orban, JBL, Beyer, AKG, Technics, MXR & more. **Paul Kadair's Inc., Baton Rouge, Louisiana, (504) 924-1001.**

REELS AND BOXES 5" and 7" large and small hubs, heavy duty white boxes. **W-M Sales, 1118 Dula Circle, Duncanville, Texas 75116 (214) 296-2773.**

USED RECORDING equipment for sale. Soon to be in Hollywood. **Dan (415) 232-7933.**

S1UDER B67 2/2 VU mint, little used DBX 158 with 2 #410 modules—mint. **Royal (404) 253-6419.**

PROFESSIONAL AUDIO EQUIPMENT

Shop for pro audio from N.Y.'s leader, no matter where you live! Use the Harvey Pro Hot-Line. (800) 223-2642 (except NY, AK, & HI) Expert advice, broadest selection such as: Otari, EXR, Ampex, Tascam and more. Write or call for price or product info:

**Harvey Professional Products Division
2 W. 45th Street
New York, NY 10036
(212) 921-5920**

UREI: FOR IMMEDIATE DELIVERY most items. **UAR Professional Systems, 8535 Fairhaven, San Antonio, TX 78229. 512-690-8888.**

AMPEX, OTARI & SCULLY recorders in stock for immediate delivery; new and rebuilt, **RCI, 8550 2nd Ave., Silver Spring, MD 20910.** Write for complete product list.

AMPEX AG-350-2: consoled, \$1300.00; unmounted, \$1100.00. Crown 800 transports-quad heads, \$500.00; with electronics, \$650.00. Magnecord 1028-2 \$225.00; no electronics \$75.00. **(215) 338-1682.**

ELECTRO-VOICE SENTRY III, Sentry IV-B, and Sentry V studio monitor speakers. E-V raw speakers and pro-music products. Otari professional recorders. Best prices—immediate shipment. **East: (305) 462-1976, West: (213) 467-5725.**

FREE CATALOG & AUDIO APPLICATIONS
**CONSOLES
KITS & WIRED
AMPLIFIERS
MIC, EQ, ACN, LINE,
TAPE, DISC, POWER
OSCILLATORS
AUDIO, TAPE BIAS
POWER SUPPLIES**
1033 N. Sycamore Ave.
Los Angeles, CA. 90038
(213) 934-3566

WANTED RECORDING EQUIPMENT OF ALL AGES AND VARIETIES

*microphones, outboard gear,
consoles, tape decks, etc.*

Dan Alexander
6026 Bernhard
Richmond, Ca. 94805 USA
(415) 232-7933 or (415) 232-7818

AMPEX AG440-4, PORTABLE CASES, two track heads included, excellent condition. Asking \$3200. **SA Audio, 6252 E. 20th, Tucson, Ariz. 85711. (602) 747-7628.**

dbx 155: FOR IMMEDIATE DELIVERY. **UAR Professional Systems, 8535 Fairhaven, San Antonio, TX 78229. 512-690-8888.**

AMPEX 440B PROFESSIONAL eight track recorder/reproducer. Excellent condition, never abused. \$7,000. **Call Fred or Mike at (516) 489-6177.**

AMPEX, OTARI, SCULLY—In stock, all major professional lines, top dollar trade-ins; 15 minutes George Washington Bridge. **Professional Audio Video Corporation, 384 Grand Street, Paterson, New Jersey 07505. (201) 523-3333.**

SCULLY, NEW and used: FOR IMMEDIATE DELIVERY. **UAR Professional Systems, 8535 Fairhaven, San Antonio, TX 78229. 512-690-8888.**

1/4-INCH TAPE duplicating system. Six Crown 800 transports. New 4-channel heads. Solid state. Mint. \$4,200.00. **(215) 338-1682.**

ORBAN. All products in stock. FOR IMMEDIATE DELIVERY. **UAR Professional Systems, 8535 Fairhaven, San Antonio, TX 78229. 512-690-8888.**

TEST RECORD for equalizing stereo systems; Helps you sell equalizers and installation services; Pink noise in 1/3-octave bands, type QR-2011-1 @ \$38.00. Used with various B & K Sound Level Meters. **Brueal & Kjaer Instruments, Inc., 185 Forest Street, Marlborough, Mass., 01752.**

CASH FOR YOUR 16 TRACK STUDIO PACKAGE

Must be complete and in perfect working order. No brokers. Principals only. Call **Mike at (703) 734-9300 (days) or (703) 451-7481. (evenings or weekends).**

LEXICON 224 Digital Reverberation. FOR IMMEDIATE DELIVERY. **UAR Professional Systems, 8535 Fairhaven, San Antonio, TX 78229. 512-690-8888.**

PRO-SOUND equipment. Mail order discount catalog free. Write or call **Sonix Co., Dept. D, P.O. Box 58, Indian Head, MD 20640 (301) 753-6432.**

BGW: FOR IMMEDIATE DELIVERY. **UAR Professional Systems, 8535 Fairhaven, San Antonio, TX 78229. 512-690-8888.**

FOR SALE: NEVE CONSOLE 24 tr., 3M M79 24 tr. tape recorder, including brand new 16 trk head assm., 24 tr. Dolbys, 3M M79 2 tr. w/Dolby, Crown & CM Lab pwr amps., UREI Speakers, UREI 1/3 octave eqs., Kepex Rack, AKG BX-20 reverb, everything needed for 24 trk studio \$117,000 takes all. Call **Tim Hunnicutt (602) 258-1610 or 258-9282.**

REBUILD YOUR MOTOR

CAPSTAN MOTOR
(AMPEX, SCULLY 7.5/15 IPS)

Replace shaft or stator **\$140**

Replace shaft and stator **\$210**

Replace upper sleeve w/ballbearing

Includes new shaft **\$160**

Includes new shaft & stator **\$230**

TAKE-UP & SUPPLY MOTOR

Replace shaft or stator **\$95**

Replace shaft and stator **\$140**

- Electrosound & 3.75/7.5 IPS motors price upon request
- All capstan shafts 440C stainless
- Take-up & supply motors, mfrs original specifications
- 3/6 weeks ARO—(201) 429-8996—Warranty
- Shipments UPS COD unless credit established.

9 Westinghouse Pl., Bloomfield, NJ 07003

DICKINSON
Auth. Ampex Repair Station

CANADIANS!

Interested in semi-pro multitrack recording?

Headquarters for:

OTARI

MIS

SOUNDCRAFT

dbx

TEAC TASCAM

DeltaLab

JBL

and many more!

Write or call:

RICHARD AUDIO INC.
6078 Sherbrooke St W Montreal, Quebec H4A 1Y1
(514) 487-9950

AKG, E/V, Sennheiser Shure, Neuman; FOR IMMEDIATE DELIVERY most models. **UAR Professional Systems, 8535 Fairhaven, San Antonio, TX 78229. 512-690-8888.**

FOR SALE: USED CROWN SA-2 amp, M-600 mono amps, Dayton Wright Electrostatic speakers XG8-Mark III. Call **Jim (215) 322-6358.**

MIDAS 24 into 10 stage monitor console with pro-4m modules, patchbay, two power supplies, case. 1 year old, mint condition. \$22,000.00. **(415) 529-2908.**

PROFESSIONAL AUDIO IN TUCSON—Crown, Otari, Altec, Sound Workshop, AKG, MXR-Pro, dbx & more. Sales, design, service and demonstration showroom. **Autograph Pro Audio, 601 E. Blackridge Dr., Tucson, AZ, (602) 882-9016.**

FOR SALE: (2) AKG 451-EB's with CK1 Capsules, (2) AKG 414-EB's, (1) AKG BX10, (1) Mellotron, (1) Farfisa VIP 345 Organ. Contact **Clay at: (516) 921-9421.**

SELLING SCULLY 284B 8 TRACK, Quantum QM128 12 x 8 board in-producer's console, and miscellaneous. Make offer(s). **(612) 253-6510.**

Lexicon Prime Time: FOR IMMEDIATE DELIVERY. **UAR Professional Systems, 8535 Fairhaven, San Antonio, TX 78229. 512-690-8888.**

NAB ALUMINUM FLANGES. We manufacture 8", 10 1/2", 12 1/2", and 14". Also large flanges and special reels to order. Stock delivery of assembly screws & nuts & most aluminum audio, video, & computer reels. For pricing, call or write **Records Reserve Corp., 56 Harvester Ave., Batavia, N.Y. 14020. (716) 343-2600.**

BUSINESS OPPORTUNITIES

AUDIO DESIGN & MANUFACTURING ENGINEERS—Do you want your own business? PULTEC (Pulse Techniques, Inc.) will be available soon when owner retires. (1411 Palisade Ave., Teaneck, NJ 07666).

SERVICES

MAGNETIC HEAD relapping—24 hour service. Replacement heads for professional recorders. IEM, 350 N. Eric Drive, Palatine, IL 60067. (312) 358-4622.

CUTTERHEAD REPAIR SERVICE for all models Westrex, HAEKO, Grampian. Modifications done on Westrex. Quick turnaround. New and used cutterheads for sale. Send for free brochure: International Cutterhead Repair, 194 Kings Ct., Teaneck, N.J. 07666. (201) 837-1289.

MULTI-TRACK RECORDING specialists—1-2-4-8-16-24 tracks, authorized dealer for Tascam, Otari, Ampex, Teac, Technics, AKG, AB Systems, Crest, SAE Pro, dbx, Orban, Tapco C12, Audioarts, Loft, Lexicon, Ashly Audio, Altec, PAS, PSL, Shure, and many more. Single items or complete studio packages. Studio design and construction. Phone or write for a prompt written quotation. Professional Sound Labs, Inc., 42 North Franklin St., Hempstead, NY 11550. (516) 486-5813.

ACOUSTIC CONSULTATION—Specializing in studios, control rooms, discos. Qualified personnel, reasonable rates. Acoustilog, Brüel & Kjaer, HP, Tektronix, Ivie, equipment calibrated on premises. Reverberation timer and RTA rentals. Acoustilog, 19 Mercer Street, New York, NY 10013 (212) 925-1365.

CASSETTE DUPLICATION stereo or mono duplication. High quality cassettes at very economical prices. Spirit Recording, Box 656, West Bend, Wis. 53095. (414) 334-5510.

JBL AND GAUSS SPEAKER WARRANTY CENTER

Fast emergency service. Speaker reconditioning and repair. Compression driver diaphragms for immediate shipment. NEWCOME SOUND, 4684 Indianola Avenue, Columbus, OH 43214. (614) 268-5605.

WANTED

WANTED: RECORDING EQUIPMENT—mikes, recorders, consoles, outboard gear. Greg Field, Box 243, San Mateo, CA 94401. (415) 343-1353.

WANTED: AMPEX MM1100 16-TRACK head stack, remote control and spares. Also 16-track console MCI, Audiotronics, etc. in the \$15,000 range. Dennis Reed, Box 50022, Palo Alto, Ca. 94303. (415) 494-9344.

EMPLOYMENT

MATURE, QUALIFIED AUDIO ENGINEER for three to six month temporary employment in Mexico City. Duties include instructing young recording studio engineers and studio techniques, plus consulting on studio related repair, troubleshooting and engineering problems. Other travel opportunities available. Excellent salary with interesting profit incentives. Contact Ron Newdell, Accurate Sound Corporation, 114 5th Avenue, Redwood City, Ca., 94063, (415) 365-2843.

SALES

We are an aggressive manufacturer of pro audio products with an excellent reputation. We need an ambitious professional to join us. Since we are the standard by which others are judged, we expect the most from our salespeople. The candidate must be good at selling and able to prove it with at least 2 years of recent experience in sales of pro sound equipment. We offer top compensation and benefits, extensive travel in an 8-10 state area and excellent prospects for a successful career. Please send resume to:

Dept. 91
db Magazine
1120 Old Country Road
Plainview, NY 11803
An Equal Opportunity Employer M/F

Keep
db
in
sound
order!

Special binders now available.

All you regular **db** readers who, Smartly enough, keep all your back issues, can now get our special binders to hold a whole year's worth of **db** magazines in neat order. No more torn-off covers, loose pages, mixed-up sequence. Twelve copies, January to December, can be maintained in proper order and good condition, so you can easily refer to any issue you need, any time, with no trouble.

They look great, too!

Made of fine quality royal blue vinyl, with a clear plastic pocket on the spine for indexing information, they make a handsome looking addition to your professional bookshelf.

Just \$7.95 each, available in North America only. (Payable in U.S. currency drawn on U.S. banks.)

Sagamore Publishing Co., Inc.
1120 Old Country Road
Plainview, NY 11803

YES! Please send _____ **db** binders @ \$7.95 each, plus applicable sales tax. Total amount enclosed \$ _____

Name _____

Company _____

Address _____

City _____

State/Zip _____

Copies of db

Copies of all issues of **db—The Sound Engineering Magazine** starting with the November 1967 issue are now available on 35 mm. microfilm. For further information or to place your order please write directly to:


University Microfilm, Inc.
300 North Zeeb Road
Ann Arbor, Michigan 48106

db People/Places/Happenings

• **AVAB America** announces its move to new and larger quarters. The facilities are located at 967 Howard Street, San Francisco, CA and will be used both for sales and manufacturing. Among the products being built there is a new system of modular dimmers. The first complete permanent installation of this system is in the studios of **KOKH-TV** in Oklahoma City, OK. The dimmers are designed to complement AVAB's line of computer-controlled and manual lightboards. AVAB is also manufacturing the FM 800, a production sound mixer for the motion picture and television industries.

• **Audio-Technica U.S., Inc.** has named **Shane O'Neil** to the position of director of public relations. His primary responsibilities are for the planning and directing of all news media activities concerning Audio-Technica and its product lines. In addition, he will be involved in advertising and sales promotion projects. Prior to joining A-T, O'Neil had been director of public relations and merchandising for a Milwaukee advertising and public relations agency and held a similar position for five years with **Koss Corporation**, a high fidelity component manufacturer.

• **Quantum Audio Labs, Inc.**, a Los Angeles based professional console manufacturer, has acquired **Audio Logic**—a spin-off of **Uni-Sync, Inc.** Audio Logic's operation will be consolidated into the Quantum Audio Labs' factory facility in Glendale, California. According to **John Pritchett**, President of Quantum Audio Labs, Inc., sales and service for both product lines will be handled out of the Glendale facility—with Audio Logic operating as a wholly owned subsidiary of Quantum Audio Labs, Inc. **Andrew C. Thompson**, former president of Audio Logic, has been named National Sales Manager for Quantum Audio Labs, Inc. and Audio Logic.

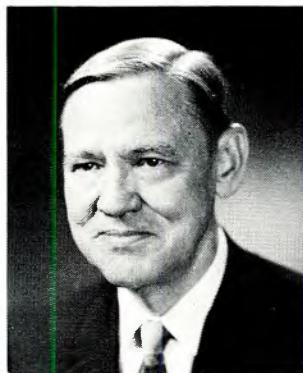

John E. Volkmann

John E. Volkmann, a pioneer in the field of room acoustics and electroacoustics, died July 9, 1980 in Princeton, New Jersey, after a short illness. His professional career spanned more than 50 years.

Mr. Volkmann was born in Chicago, Illinois July 26, 1905. He received his BS (1927), MS (1928) and Professional Degree (1940) from the University of Illinois.

He worked continuously with **RCA** in the field of acoustics, specializing in the development and application of large scale auditorium loudspeakers and stereophonic sound systems, as well as a consultant on architectural, electronic and acoustic problems. He contributed to the solution of innumerable projects, including stereophonic sound systems for the **Radio City Music Hall**, the **Hollywood Bowl**, the recording acoustics for Walt Disney's **Fantasia**, custom loudspeakers for the **New York World's Fairs of 1938 and 1964-65** and the **Jones Beach Marina Stadium**. He provided the acoustic design for the **RCA Italiana's** 364,000 cu. ft. Studio A—regarded as the largest and first ever built for the recording of full scale operas and symphonic orchestras. He was responsible for the development and

design of the sound systems for the **John F. Kennedy Center** in Washington, D.C. He applied his pioneering concept of variable acoustics to the design of the **RCA Victor Recording Studios** in New York City.

For more than three decades, Mr. Volkmann was in charge of the advanced acoustic development and theater engineering activities at **RCA Camden**, New Jersey. In 1964 he transferred to the **RCA Laboratories**, Princeton, New Jersey as a member of the technical staff. He retired from RCA in 1970.

He has written numerous technical papers for scientific journals and holds several U.S. Patents.

In 1962 he received the **RCA Achievement Award** for "Advances in the Development of Architectural Acoustics" and in 1967 the **John H. Potts Memorial Award** from the **Audio Engineering Society** for "Elegant Application of Acoustic Principles in the Development of Large Scale Loudspeakers and Sound Systems." He was a member of honorary scientific fraternities, a Fellow of the **Acoustical Society of America**, the **Audio Engineering Society** and the **Society of Motion Picture and Television Engineers**.

Submitted by Harry F. Olson

Need more facts fast?

Use the attached postage-free Reader Service Cards for free technical data.

Circle the number on this card that corresponds to the number beneath the ad or editorial.

PLEASE PRINT CAREFULLY

Name & Title

Company

Company Address

City/State/Zip

September 1980 — Use this card before December 1980

I AM A SUBSCRIBER

Please check your area of employment or occupation:

- (a) Recording Studio
- (b) Radio Broadcasting
- (c) TV Broadcasting
- (d) Audio/Visual
- (e) Video Recording
- (f) Commercial Sound
- (g) Film Sound
- (h) Other

1	21	41	61	81
2	22	42	62	82
3	23	43	63	83
4	24	44	64	84
5	25	45	65	85
6	26	46	66	86
7	27	47	67	87
8	28	48	68	88
9	29	49	69	89
10	30	50	70	90
11	31	51	71	91
12	32	52	72	92
13	33	53	73	93
14	34	54	74	94
15	35	55	75	95
16	36	56	76	96
17	37	57	77	97
18	38	58	78	98
19	39	59	79	99
20	40	60	80	100

Circle the number on this card that corresponds to the number beneath the ad or editorial.

PLEASE PRINT CAREFULLY

Name & Title

Company

Company Address

City/State/Zip

September 1980 — Use this card before December 1980

I AM A SUBSCRIBER

Please check your area of employment or occupation:

- (a) Recording Studio
- (b) Radio Broadcasting
- (c) TV Broadcasting
- (d) Audio/Visual
- (e) Video Recording
- (f) Commercial Sound
- (g) Film Sound
- (h) Other

1	21	41	61	81
2	22	42	62	82
3	23	43	63	83
4	24	44	64	84
5	25	45	65	85
6	26	46	66	86
7	27	47	67	87
8	28	48	68	88
9	29	49	69	89
10	30	50	70	90
11	31	51	71	91
12	32	52	72	92
13	33	53	73	93
14	34	54	74	94
15	35	55	75	95
16	36	56	76	96
17	37	57	77	97
18	38	58	78	98
19	39	59	79	99
20	40	60	80	100

Keep

db

coming!

THE SOUND ENGINEERING MAGAZINE



Enter my subscription to
db — The Sound Engineering Magazine.
My check is enclosed.

	Domestic	Foreign	Canada
1 Year	\$12.00	\$24.00	\$13.00
2 Years	\$22.00	\$44.00	\$23.00
3 Years	\$30.00	\$60.00	\$31.00

Name

Address

City/State/Zip

Company Affiliation

Title

Signature & Date

IF RENEWAL PLEASE CHECK

Check must be in U.S. funds drawn on a U.S. bank.

THE SOUND ENGINEERING MAGAZINE



Enter my subscription to
db — The Sound Engineering Magazine.
My check is enclosed.

	Domestic	Foreign	Canada
1 Year	\$12.00	\$24.00	\$13.00
2 Years	\$22.00	\$44.00	\$23.00
3 Years	\$30.00	\$60.00	\$31.00

Name

Address

City/State/Zip

Company Affiliation

Title

Signature & Date

IF RENEWAL PLEASE CHECK

Check must be in U.S. funds drawn on a U.S. bank.




No Postage
Necessary
if Mailed
in the
United States

BUSINESS REPLY CARD

FIRST CLASS PERMIT NUMBER 217 CLINTON, IOWA

Postage will be paid by addressee

db The Sound Engineering Magazine
P.O. Box 2521
Clinton, Iowa 52735



No Postage
Necessary
if Mailed
in the
United States

BUSINESS REPLY CARD

FIRST CLASS PERMIT NUMBER 217 CLINTON, IOWA

Postage will be paid by addressee

db The Sound Engineering Magazine
P.O. Box 2521
Clinton, Iowa 52735



Please fill in *all items* on the
reverse side of this card
and be sure to enclose your check.

Please fill in *all items* on the
reverse side of this card
and be sure to enclose your check.


Mail to: 

The Sound Engineering Magazine
Sagamore Publishing Co.
1120 Old Country Road
Plainview, New York 11803

Mail to: 

The Sound Engineering Magazine
Sagamore Publishing Co.
1120 Old Country Road
Plainview, New York 11803

20,000 copies in print

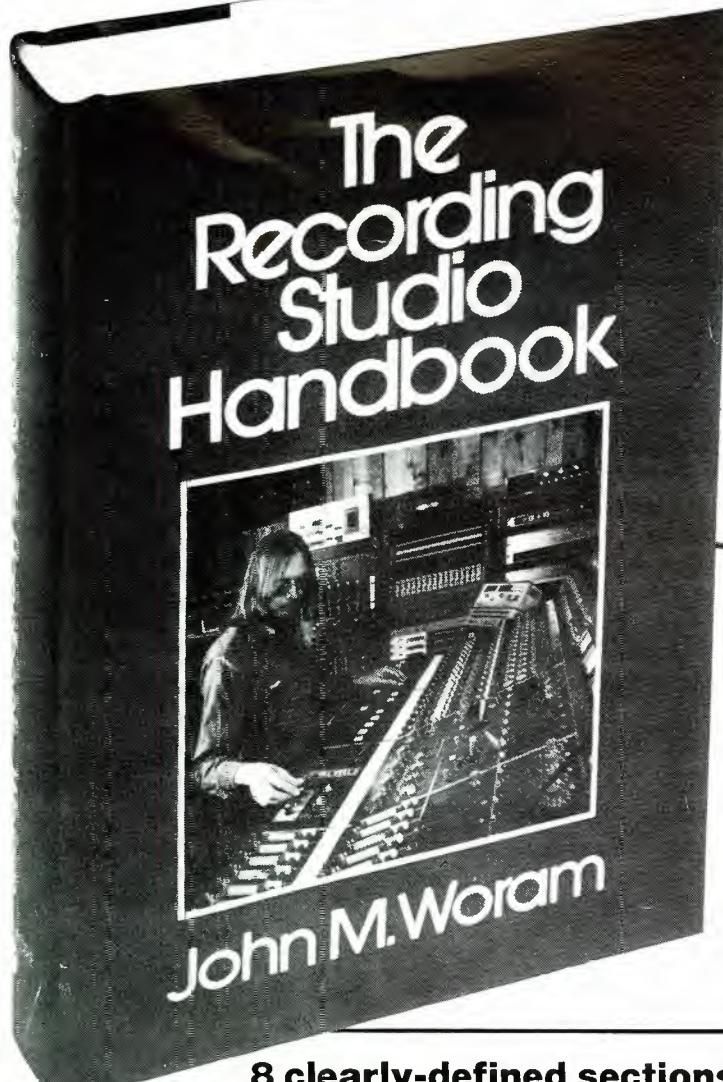

**8 clearly-defined sections
18 information-packed chapters**

I. The Basics The Decibel Sound	V. Noise and Noise Reduction Noise and Noise Reduction Principles Studio Noise Reduction Systems
II. Transducers: Microphones and Loudspeakers Microphone Design Microphone Technique Loudspeakers	VI. Recording Consoles The Modern Recording Studio Console
III. Signal Processing Devices Echo and Reverberation Equalizers Compressors, Limiters and Expanders Flanging and Phasing	VII. Recording Techniques The Recording Session The Mixdown Session
IV. Magnetic Recording Tape and Tape Recorder Fundamentals Magnetic Recording Tape The Tape Recorder	VIII. Appendices Table of Logarithms Power, Voltage, Ratios and Decibels Frequency, Period and Wavelength of Sound Conversion Factors NAB Standard Bibliography Glossary

Use the coupon to order your copies today at \$37.50 each.
And there's a 15-day money-back guarantee.



Fourth big printing of the definitive manual of recording technology!

"John Woram has filled a gaping hole in the audio literature. This is a very fine book ... I recommend it highly.

—High Fidelity. And the **Journal of the Audio Engineering Society** said, "A very useful guide for anyone seriously concerned with the magnetic recording of sound."

So widely read . . . so much in demand . . . that we've had to go into a fourth printing of this all-encompassing guide to every important aspect of recording technology. An indispensable guide with something in it for everybody to learn, it is the audio industry's first complete handbook on the subject. It is a clear, practical, and often witty approach to understanding what makes a recording studio work. In covering all aspects, Woram, editor of *db Magazine*, has provided an excellent basics section, as well as more in-depth explanations of common situations and problems encountered by the professional engineer.

SAGAMORE PUBLISHING COMPANY, INC.
1120 Old Country Road, Plainview, N.Y. 11803

Yes! Please send copies of THE RECORDING STUDIO HANDBOOK \$37.50. On 15-day approval.

Name _____

Address _____

City/State/Zip _____

Total payment enclosed \$ _____

(In N.Y.S. add appropriate sales tax)

Please charge my Master Charge
 BankAmericard/Visa

Account # Expiry date

Signature _____ Exp. date _____

Signature _____
(charges not valid unless signed)

Outside U.S.A. add \$2.00 for postage.

HIGHEST QUALITY FOR THE 1980's.

Join the Neve world of excellence for highest quality audio. From the 4 new small mixers in the 542 range to the most comprehensive TV production consoles, Neve offers an incomparable choice of state-of-the-art audio products.

Please call or write. We're in your future!



Model 5422
Suitcase Mixer
Ni-Cad powered

Model 5442
Table Top
Mixer



Other 542 Range Mixers:
Model 5422R Rack Mounted
Model 5432 Table Drop Through

 **Neve**

Rupert Neve Incorporated - Berkshire Industrial Park, Bethel, Connecticut 06801 Tel: (203) 744-6230 Telex: 969638

Rupert Neve Incorporated - Suite 609, 5255 Sunset Blvd., Hollywood, California 90028 Tel: (213) 465-4822

Rupert Neve of Canada, Ltd. - 2721 Rena Road, Malton, Ontario L4T 3K1, Canada Tel: (416) 677-6611 Telex: 983502

Neve Electronics International, Ltd. - Cambridge House, Melbourne, Hertfordshire SG8 6AU England Tel: (0763) 60776

Rupert Neve GmbH - 6100 Darmstadt Bismarckstrasse 114, West Germany Tel: (06151) 31764

Circle 1 on Reader Service Card